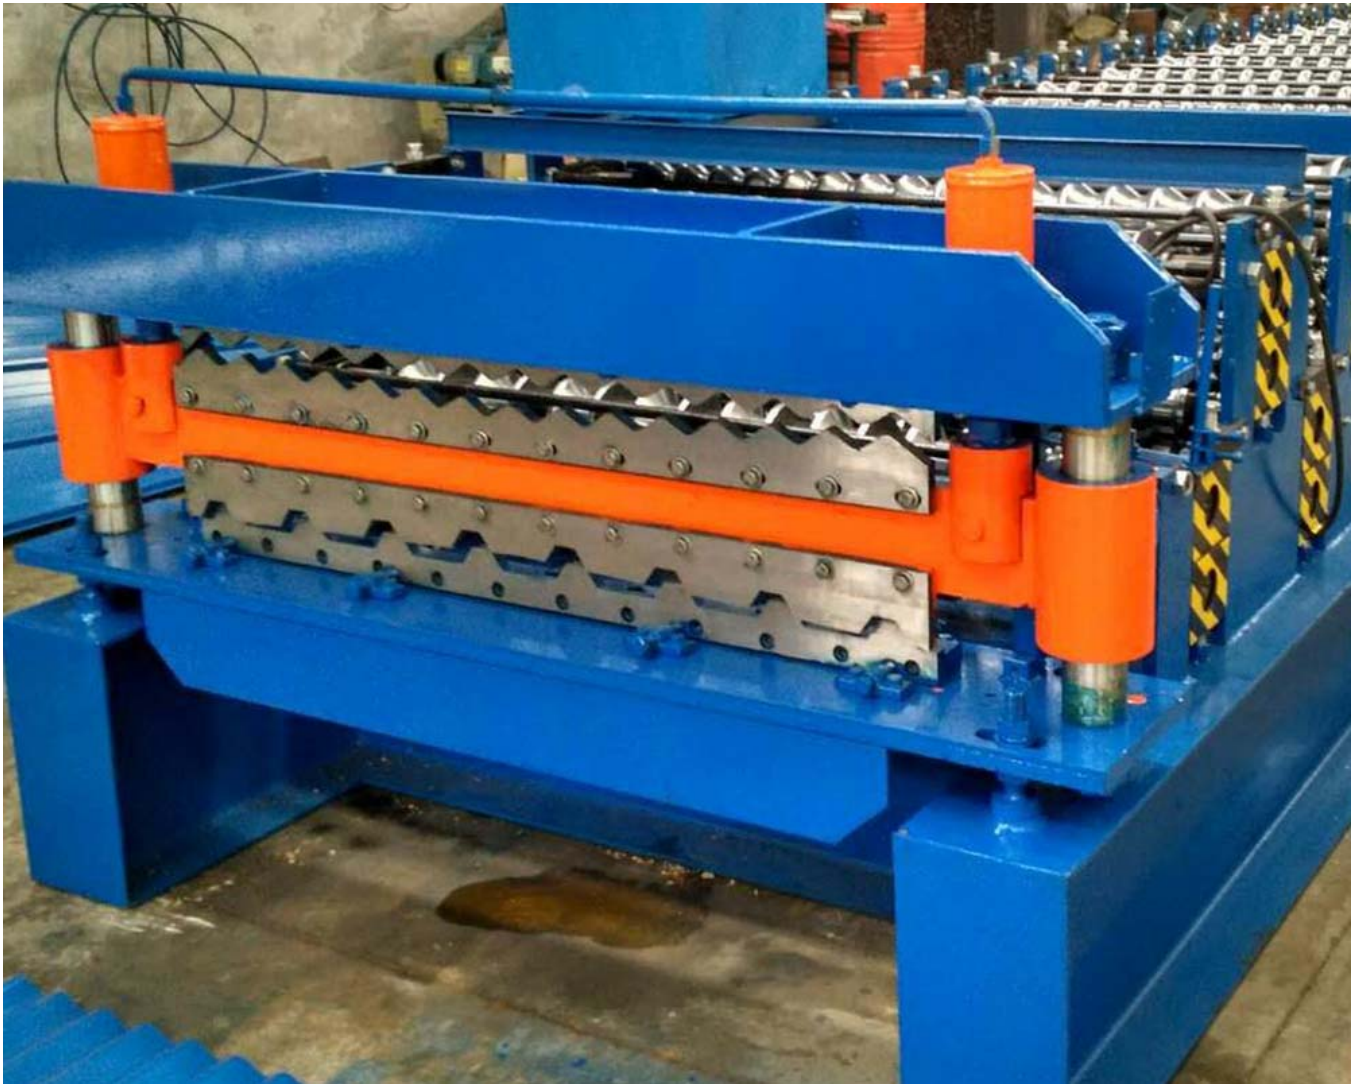

Cheap price Cold Roll Forming Machine - Double Layer Roll Forming Machine For Roof Use - Haixing Industrial

Parameters of double layer roll forming machine

1	Main motor power	4kW, 3-phase or as your requests
2	Hydraulic motor power	3kW
3	Hydraulic pressure	10-12MPa
4	Voltage	380V/3-phase/50Hz (or as your requirements)
5	Control system	PLC delta inverter
6	Mainframe	300/350mm H-beam or 350mm
7	Backboard thickness	16mm
8	Chain size	1 Inch
9	Feeding material	color steel coils
10	Feeding thickness	0.3-0.8mm
11	Feeding width	1000mm
12	Effective width	840mm, 850mm
13	Productivity	0-15/min
14	Roll station	13 roll steps (according to different design)
15	Roller diameter	70mm (depends on different design)
16	Roller material	45# steel
17	Cutter material	Cr12
18	Cr-plating size	0.05mm
19	Overall size	6800*1400*1150mm
20	Total weight	4.8 tons

The components of the tile press include: color steel tile machine, PLC computer control system, hydraulic pump station system, fully automatic rear shear system.

Machine photos



Components of double layer roll forming machine for roof use

No.	Name	Unit	Quantity
1	Manual decoiler	Set	1
2	Main forming machine	Set	1
3	PLC control system	Set	1
4	Hydraulic pump station	Set	1
5	Post cut	Set	1
6	Electric motor	Set	1
7	Output table	Set	1

Terms:

1. Delivery: within 60 days after receiving the deposit.
2. Package: export standard package for container.
3. Payment: TT (30% by TT in advance, 70% by TT after inspect the machine before delivery).

Our company owned professional design team, we can design different profile according customer's demands.

Why choose us ?

Professional:

With 10 years' professional manufacturing experience in roll forming machinery;

Professional production line,well -trained workers,strict QC standard.

Product link : <https://www.toprollformingmachine.com/?p=106954>