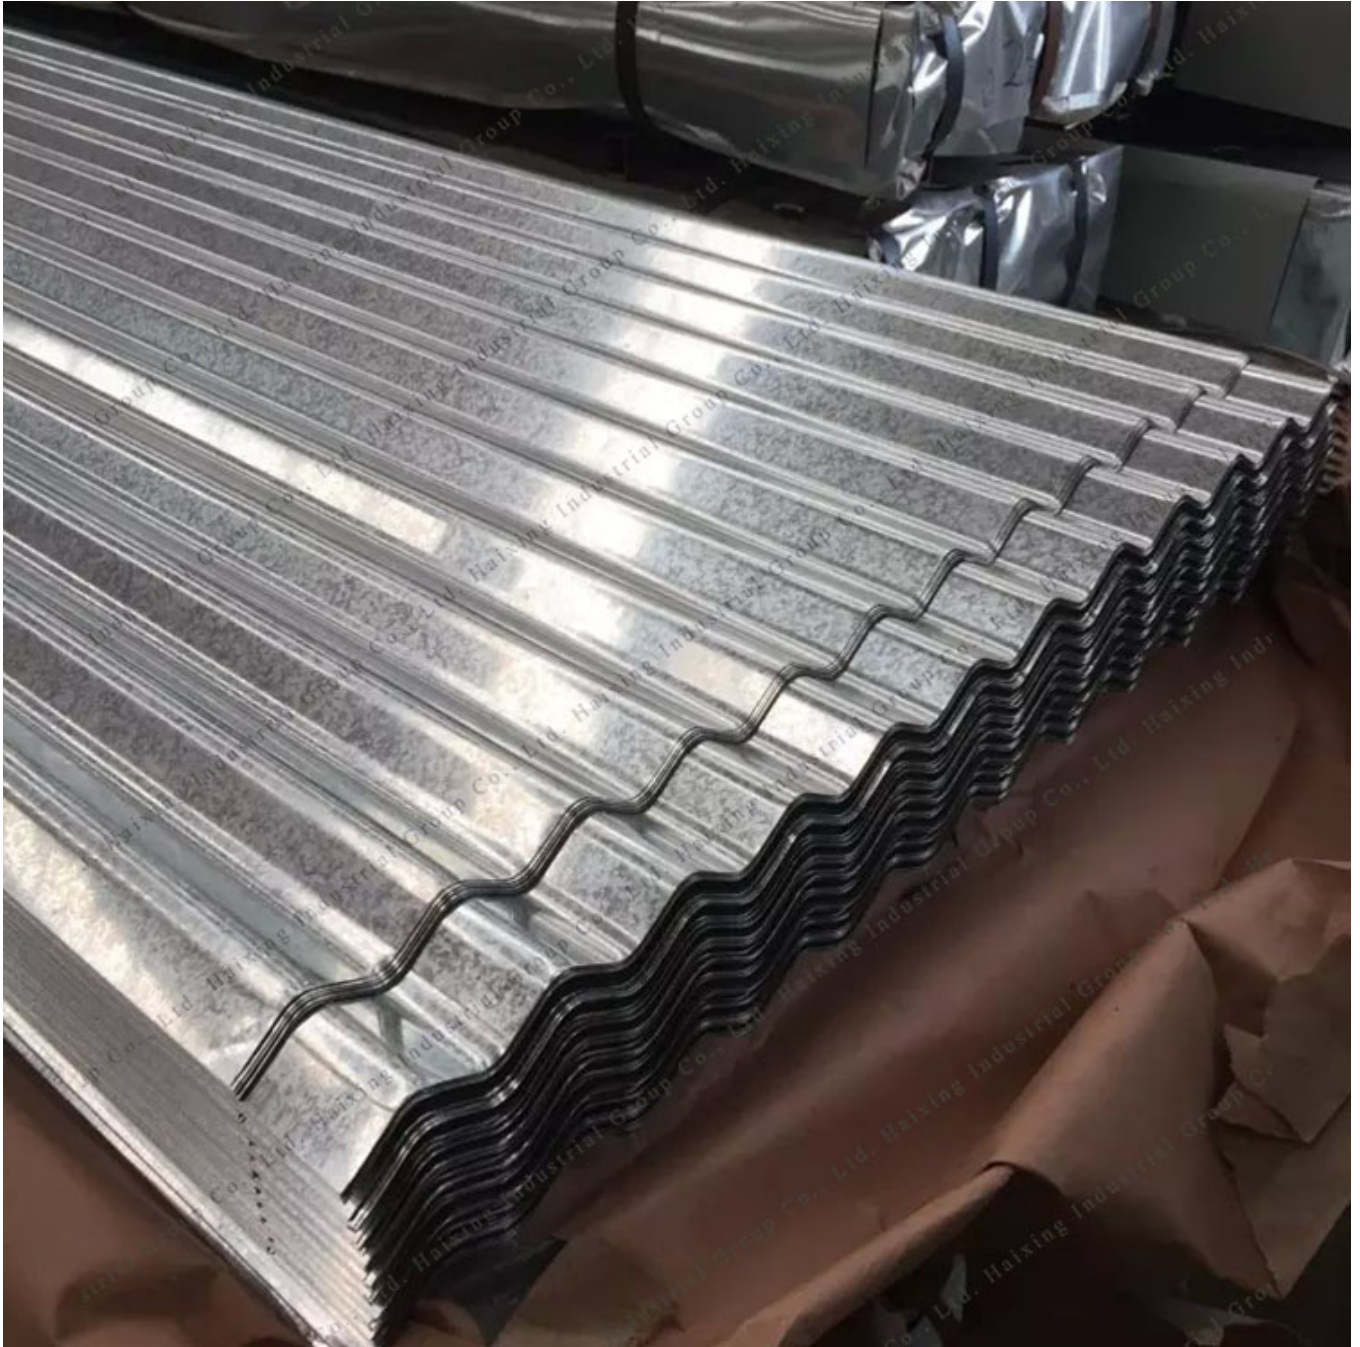

Coated Roof Tile Production Line

Coated Roof Tile Production Line Description

1	The material of input sheet	Galvanized steel/ colored steel
2	Effective width	Customize
3	Feeding width	Customize
4	Control system	PLC control system with inverter (Delta brand)
5	Diameter of roller	75mm
6	Material thickness	0.2-0.8mm
7	Main motor power	5.5kw
8	Hydraulic pump power	4kw
9	Working speed	10-14m/min
10	The material of cutting knives	Cr12 quenching
11	Material of roller	45# steel with chrome
12	Mainframe	350H steel
13	Voltage	380v 3phase 50hz
14	Weight	about 3 T
15	Size	7.5m×1.5m×1.5m
16	Forming step	18 steps

Details of Coated Roof Tile Production Line





Terms of Payment: 30% of the total contract value paid by T/T as down payment, the rest 70% of the total contract value to be paid by T/T after inspection by the buyer in seller's factory while before delivery.

Delivery: 30 days after receipt of advance payment

Product link : <https://www.toprollformingmachine.com/?p=298409>