Cheapest Price Automatic Galvanized Steel Plate Roller Shutter Door Frame Cold Roll Forming Machine


Dependable high-quality and fantastic credit standing are our principles, which will help us at a top-ranking position. Adhering to your tenet of "quality very first, client supreme" for Cheapest Price Automatic Galvanized Steel Plate Roller Shutter Door Frame Cold Roll Forming Machine, To improved expand sector, we sincerely invite ambitious individuals and corporations to join as an agent. Dependable high-quality and fantastic credit standing are our principles, which will help us at a top-ranking position. Adhering to your tenet of "quality very first, client supreme" for Door Frame Cold Machine, Galvanized Steel Door Machine, Roller Shutter Door Machine, Our stock have valued 8 million dollar , you can find the competitive parts within short delivery time. Our company is not only your partner in business, but also our company is your assistant in the coming corporation.

1 Material width 3 sizes. Waiting for buyer exactly profile 2 How to adjust size Option: by PLC (It can be adjust by PLC and also in hand wheel) One side fixed and the other is adjustable by manual or PLC 3 Base frame base frame base frame 30 mm thick steel plate process the surface on CNC planer to keep it leveling and drill bolts and key slot by CNC 4 Rolling Speed 12-15m/min(not include cutting time) 5 Rolling Thickness 1.2-2.0mm 6 Material GI or metal 7 Control System PLC (Panasonic) as list in the note 8 decoiler 3 Ton manual decoiler 9 Leveling Up in 3 roller, down in 4 roller 10 Roller Stations About 20 stations 11 Roller Material GCr15, coated with chrome HRC58-62 degree 12 Shaft Material and DIA Tomm, material is 45# forge steel 13 Maim Motor Power 11kw brake motor 14 Hydraulic Station Power 5.5kw 15 Hydraulic Pressure 20Mpa 16 Capacity of tonnage for punching Hydraulic pump brand Lichao 18 Cutting Hydraulic post-cutting for cut end product 19 Extra cutter One more cutter for each profile 20 Material Of Cutting Cr12Mov quenching 58-62°C 21 Electric Source 380V, 60HZ, 3 phase 22 Way Of Drive 1.2 inch single chain 24 Machine Type Iron Cast	Steel profile door frame roll forming machine parameters				
wheel) One side fixed and the other is adjustable by manual or PLC 3 Base frame base frame base frame 30 mm thick steel plate process the surface on CNC planer to keep it leveling and drill bolts and key slot by CNC 4 Rolling Speed 12-15m/min(not include cutting time) 5 Rolling Thickness 1.2-2.0mm 6 Material GI or metal 7 Control System PLC (Panasonic) as list in the note decoiler 3 Ton manual decoiler 9 Leveling Up in 3 roller, down in 4 roller 10 Roller Stations About 20 stations 11 Roller Material GCr15, coated with chrome HRC58-62 degree 12 Shaft Material and DIA D70mm, material is 45# forge steel 13 Maim Motor Power 11kw brake motor 14 Hydraulic Station Power 5.5kw 15 Hydraulic Pressure 20Mpa 16 Capacity of tonnage for punching Hydraulic pump brand Lichao 18 Cutting Hydraulic post-cutting for cut end product 19 Extra cutter One more cutter for each profile 20 Material Of Cutting Cr12Mov quenching 58-62°C 21 Electric Source 380V, 60HZ, 3 phase 22 Way Of Drive 1.2 inch single chain 23 Color Of The Machine Yellow and blue 24 Machine Type Iron Cast 26 Protect cover Complete mobile safety cover from roll forming to the cutter.	1				
One side fixed and the other is adjustable by manual or PLC Base frame base frame 30 mm thick steel plate process the surface on CNC planer to keep it leveling and drill bolts and key slot by CNC Rolling Speed 12-15m/min(not include cutting time) Rolling Thickness 1.2-2.0mm Material GI or metal Control System PLC (Panasonic) as list in the note According Up in 3 roller, down in 4 roller Roller Stations About 20 stations Roller Material Gcr15, coated with chrome HRC58-62 degree Shaft Material and DIA 70mm, material is 45# forge steel Maim Motor Power 11kw brake motor Hydraulic Station Power 5.5kw Hydraulic Pressure 20Mpa Capacity of tonnage for punching 17 Hydraulic pump brand Lichao Kutting Hydraulic post-cutting for cut end product One more cutter for each profile Cr12Mov quenching 58-62°C Helectric Source 380V, 60HZ, 3 phase Ze Way Of Drive 1.2 inch single chain Yellow and blue Machine Type Iron Cast In main machine and control panel all have emergency switch for forbid any urgently accident.	2	How to adjust size	Option : by PLC (It can be adjust by PLC and also in hand		
Base frame base frame 30 mm thick steel plate process the surface on CNC planer to keep it leveling and drill bolts and key slot by CNC 4 Rolling Speed 12-15m/min(not include cutting time) 5 Rolling Thickness 1.2-2.0mm 6 Material GI or metal 7 Control System PLC (Panasonic) as list in the note 8 decoiler 3 Ton manual decoiler 9 Leveling Up in 3 roller, down in 4 roller 10 Roller Stations About 20 stations 11 Roller Material GCr15, coated with chrome HRC58-62 degree 12 Shaft Material and DIA 70mm, material is 45# forge steel 13 Maim Motor Power 11kw brake motor 14 Hydraulic Station Power 15 Hydraulic Pressure 20Mpa 16 Capacity of tonnage for punching Part of the Cutting Portion on the Cutting Portion on the Cutting Portion on the Cutter One more cutter for each profile 20 Material Of Cutting Cr12Mov quenching 58-62°C 21 Electric Source 380V, 60HZ, 3 phase 22 Way Of Drive 1.2 inch single chain 24 Machine Type Iron Cast In main machine and control panel all have emergency switch for forbid any urgently accident. 26 Protect cover Complete mobile safety cover from roll forming to the cutter.		-	wheel)		
Base frame base frame on CNC planer to keep it leveling and drill bolts and key slot by CNC 4 Rolling Speed 12-15m/min(not include cutting time) 5 Rolling Thickness 1.2-2.0mm 6 Material GI or metal 7 Control System PLC (Panasonic) as list in the note 8 decoiler 3 Ton manual decoiler 9 Leveling Up in 3 roller, down in 4 roller 10 Roller Stations About 20 stations 11 Roller Material GCr15, coated with chrome HRC58-62 degree 12 Shaft Material and DIA 70mm, material is 45# forge steel 13 Maim Motor Power 11kw brake motor 14 Hydraulic Station Power 5.5kw 15 Hydraulic Pressure 20Mpa 16 Capacity of tonnage for punching 17 Hydraulic pump brand Lichao 18 Cutting Hydraulic post-cutting for cut end product 19 Extra cutter One more cutter for each profile 20 Material Of Cutting Cr12Mov quenching 58-62°C 21 Electric Source 380V, 60HZ,3 phase 22 Way Of Drive 1.2 inch single chain 23 Color Of The Machine Yellow and blue 24 Machine Type Iron Cast 25 Emergency switch In main machine and control panel all have emergency switch for forbid any urgently accident. 26 Protect cover Complete mobile safety cover from roll forming to the cutter.			One side fixed and the other is adjustable by manual or		
on CNC planer to keep it leveling and drill bolts and key slot by CNC 4 Rolling Speed 12-15m/min(not include cutting time) 5 Rolling Thickness 1.2-2.0mm 6 Material GI or metal 7 Control System PLC (Panasonic) as list in the note 8 decoiler 3 Ton manual decoiler 9 Leveling Up in 3 roller, down in 4 roller 10 Roller Stations About 20 stations 11 Roller Material GCr15, coated with chrome HRC58-62 degree 12 Shaft Material and DIA 70mm, material is 45# forge steel 13 Maim Motor Power 11kw brake motor 14 Hydraulic Pressure 20Mpa 16 Capacity of tonnage for punching Patricular Diagram of the cutter one more cutter for each profile 17 Hydraulic pump brand Lichao 18 Cutting Hydraulic post-cutting for cut end product 19 Extra cutter One more cutter for each profile 20 Material Of Cutting Cr12Mov quenching 58-62°C 21 Electric Source 380V, 60HZ,3 phase 22 Way Of Drive 1.2 inch single chain 23 Color Of The Machine Yellow and blue 24 Machine Type Iron Cast 15 In main machine and control panel all have emergency switch for forbid any urgently accident. 26 Protect cover Complete mobile safety cover from roll forming to the cutter.					
Slot by CNC	3	Base frame	· · ·		
4 Rolling Speed 5 Rolling Thickness 6 Material 7 Control System 8 decoiler 9 Leveling 10 Roller Stations 11 Roller Material 12 Shaft Material and DIA 13 Maim Motor Power 14 Hydraulic Station Power 15 Hydraulic Pressure 16 Capacity of tonnage for punching 17 Hydraulic pump brand 18 Cutting 19 Extra cutter 20 Material Of Cutting 20 Material Of Cutting 21 Electric Source 22 Way Of Drive 23 Color Of The Machine 24 Machine Type 26 Protect cover 26 Protect cover 26 Material In Material Station Power 10 Roller System 10 Roller Material 11 Gr (Panasonic) as list in the note 12 (Panasonic) as list in the note 13 Hydr of metal 14 (Panasonic) as list in the note 14 Hydralle Coller 15 About 20 stations 16 About 20 stations 17 About 20 stations 18 Cutting Tomm, material is 45# forge steel 19 At provide Tomm, material is 45# forge steel 10 Tomm, material is 45# forge steel 11 Lichao 12 Dampha Station Power 12 Dampha Station Power 13 Lichao 14 Hydraulic post-cutting for cut end product 15 Cri 2Mov quenching 58-62°C 16 Lichao Station Power 17 Dampha Station Power 18 Cri 2Mov quenching 58-62°C 29 Forest Color of The Machine 20 Machine Type 10 Forest Cover 21 In main machine and control panel all have emergency switch for forbid any urgently accident. 26 Protect cover 26 Complete mobile safety cover from roll forming to the cutter.			1 ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' ' '		
5Rolling Thickness1.2-2.0mm6MaterialGI or metal7Control SystemPLC (Panasonic) as list in the note8decoiler3 Ton manual decoiler9LevelingUp in 3 roller, down in 4 roller10Roller StationsAbout 20 stations11Roller MaterialGcr15, coated with chrome HRC58-62 degree12Shaft Material and DIA70mm, material is 45# forge steel13Maim Motor Power11kw brake motor14Hydraulic Station Power5.5kw15Hydraulic Pressure20Mpa16Capacity of tonnage for punching22Tons17Hydraulic pump brandLichao18CuttingHydraulic post-cutting for cut end product19Extra cutterOne more cutter for each profile20Material Of CuttingCr12Mov quenching 58-62°C21Electric Source380V, 60HZ,3 phase22Way Of Drive1.2 inch single chain23Color Of The MachineYellow and blue24Machine TypeIron CastEmergency switchIn main machine and control panel all have emergency switch for forbid any urgently accident.26Protect coverComplete mobile safety cover from roll forming to the cutter.					
6 Material GI or metal 7 Control System PLC (Panasonic) as list in the note 8 decoiler 3 Ton manual decoiler 9 Leveling Up in 3 roller, down in 4 roller 10 Roller Stations About 20 stations 11 Roller Material Gcr15, coated with chrome HRC58-62 degree 12 Shaft Material and DIA 70mm, material is 45# forge steel 13 Maim Motor Power 11kw brake motor 14 Hydraulic Station Power 15 Hydraulic Pressure 20Mpa 16 Capacity of tonnage for punching 17 Hydraulic pump brand Lichao 18 Cutting Hydraulic post-cutting for cut end product 19 Extra cutter One more cutter for each profile 20 Material Of Cutting Cr12Mov quenching 58-62°C 21 Electric Source 380V, 60HZ,3 phase 22 Way Of Drive 1.2 inch single chain 23 Color Of The Machine Yellow and blue 24 Machine Type Iron Cast 25 Emergency switch In main machine and control panel all have emergency switch for forbid any urgently accident. 26 Protect cover Complete mobile safety cover from roll forming to the cutter.					
7 Control System PLC (Panasonic) as list in the note 8 decoiler 3 Ton manual decoiler 9 Leveling Up in 3 roller, down in 4 roller 10 Roller Stations About 20 stations 11 Roller Material Gcr15, coated with chrome HRC58-62 degree 12 Shaft Material and DIA 70mm, material is 45# forge steel 13 Maim Motor Power 11kw brake motor 14 Hydraulic Station Power 5.5kw 15 Hydraulic Pressure 20Mpa 16 Capacity of tonnage for punching 17 Hydraulic pump brand Lichao 18 Cutting Hydraulic post-cutting for cut end product 19 Extra cutter One more cutter for each profile 20 Material Of Cutting Cr12Mov quenching 58-62°C 21 Electric Source 380V, 60HZ,3 phase 22 Way Of Drive 1.2 inch single chain 23 Color Of The Machine Yellow and blue 124 Machine Type Iron Cast 25 Emergency switch In main machine and control panel all have emergency switch for forbid any urgently accident. 26 Protect cover Complete mobile safety cover from roll forming to the cutter.					
8 decoiler 3 Ton manual decoiler 9 Leveling Up in 3 roller, down in 4 roller 10 Roller Stations About 20 stations 11 Roller Material Gcr15, coated with chrome HRC58-62 degree 12 Shaft Material and DIA 70mm, material is 45# forge steel 13 Maim Motor Power 11kw brake motor 14 Hydraulic Station Power 15 Hydraulic Pressure 20Mpa 16 Capacity of tonnage for punching 17 Hydraulic pump brand Lichao 18 Cutting Hydraulic post-cutting for cut end product 19 Extra cutter One more cutter for each profile 20 Material Of Cutting Cr12Mov quenching 58-62°C 21 Electric Source 380V, 60HZ,3 phase 22 Way Of Drive 1.2 inch single chain 23 Color Of The Machine Yellow and blue 24 Machine Type Iron Cast 25 Emergency switch In main machine and control panel all have emergency switch for forbid any urgently accident. 26 Protect cover Complete mobile safety cover from roll forming to the cutter.					
9 Leveling Up in 3 roller, down in 4 roller 10 Roller Stations About 20 stations 11 Roller Material Gcr15, coated with chrome HRC58-62 degree 12 Shaft Material and DIA 70mm, material is 45# forge steel 13 Maim Motor Power 11kw brake motor 14 Hydraulic Station Power 15 Hydraulic Pressure 20Mpa 16 Capacity of tonnage for punching 17 Hydraulic pump brand Lichao 18 Cutting Hydraulic post-cutting for cut end product 19 Extra cutter One more cutter for each profile 20 Material Of Cutting Cr12Mov quenching 58-62°C 21 Electric Source 380V, 60HZ,3 phase 22 Way Of Drive 1.2 inch single chain 23 Color Of The Machine Yellow and blue 24 Machine Type Iron Cast 25 Emergency switch In main machine and control panel all have emergency switch for forbid any urgently accident. 26 Protect cover Complete mobile safety cover from roll forming to the cutter.		-	` ,		
10 Roller Stations About 20 stations 11 Roller Material Gcr15, coated with chrome HRC58-62 degree 12 Shaft Material and DIA □ 70mm, material is 45# forge steel 13 Maim Motor Power 11kw brake motor 14 Hydraulic Station Power 15 Hydraulic Pressure 20Mpa 16 Capacity of tonnage for punching 17 Hydraulic pump brand Lichao 18 Cutting Hydraulic post-cutting for cut end product 19 Extra cutter One more cutter for each profile 20 Material Of Cutting Cr12Mov quenching 58-62°C 21 Electric Source 380V, 60HZ,3 phase 22 Way Of Drive 1.2 inch single chain 23 Color Of The Machine Yellow and blue 24 Machine Type Iron Cast 25 Emergency switch In main machine and control panel all have emergency switch for forbid any urgently accident. 26 Protect cover Complete mobile safety cover from roll forming to the cutter.					
11Roller MaterialGcr15, coated with chrome HRC58-62 degree12Shaft Material and DIA\$\textstyle{1}\text{ 70mm}\$, material is 45\# forge steel\$13Maim Motor Power\$1\text{1kw brake motor}\$14Hydraulic Station Power\$5.5\text{kw}\$15Hydraulic Pressure\$20Mpa\$16Capacity of tonnage for punching\$22Tons17Hydraulic pump brand\$Lichao18\$CuttingHydraulic post-cutting for cut end product19\$Extra cutter\$One more cutter for each profile20\$Material Of Cutting\$Cr12Mov quenching 58-62\circ C21\$Electric Source\$380V, 60HZ,3 phase22\$Way Of Drive\$1.2 inch single chain23\$Color Of The Machine\$Yellow and blue24\$Machine Type\$Iron Cast25\$Emergency switch\$In main machine and control panel all have emergency switch for forbid any urgently accident.26\$Protect cover\$Complete mobile safety cover from roll forming to the cutter.		Ü	Up in 3 roller, down in 4 roller		
12 Shaft Material and DIA					
13Maim Motor Power11kw brake motor14Hydraulic Station Power5.5kw15Hydraulic Pressure20Mpa16Capacity of tonnage for punching22Tons17Hydraulic pump brandLichao18CuttingHydraulic post-cutting for cut end product19Extra cutterOne more cutter for each profile20Material Of CuttingCr12Mov quenching 58-62°C21Electric Source380V, 60HZ,3 phase22Way Of Drive1.2 inch single chain23Color Of The MachineYellow and blue24Machine TypeIron Cast25Emergency switchIn main machine and control panel all have emergency switch for forbid any urgently accident.26Protect coverComplete mobile safety cover from roll forming to the cutter.			·		
14Hydraulic Station Power5.5kw15Hydraulic Pressure20Mpa16Capacity of tonnage for punching22Tons17Hydraulic pump brandLichao18CuttingHydraulic post-cutting for cut end product19Extra cutterOne more cutter for each profile20Material Of CuttingCr12Mov quenching 58-62°C21Electric Source380V, 60HZ,3 phase22Way Of Drive1.2 inch single chain23Color Of The MachineYellow and blue24Machine TypeIron Cast25Emergency switchIn main machine and control panel all have emergency switch for forbid any urgently accident.26Protect coverComplete mobile safety cover from roll forming to the cutter.		Shaft Material and DIA	☐ 70mm, material is 45# forge steel		
15 Hydraulic Pressure 20Mpa 16 Capacity of tonnage for punching 17 Hydraulic pump brand 18 Cutting Hydraulic post-cutting for cut end product 19 Extra cutter One more cutter for each profile 20 Material Of Cutting Cr12Mov quenching 58-62°C 21 Electric Source 380V, 60HZ,3 phase 22 Way Of Drive 1.2 inch single chain 23 Color Of The Machine Yellow and blue 24 Machine Type Iron Cast 25 Emergency switch In main machine and control panel all have emergency switch for forbid any urgently accident. 26 Protect cover Complete mobile safety cover from roll forming to the cutter.		Maim Motor Power			
16 Capacity of tonnage for punching 17 Hydraulic pump brand 18 Cutting Hydraulic post-cutting for cut end product 19 Extra cutter One more cutter for each profile 20 Material Of Cutting Cr12Mov quenching 58-62°C 21 Electric Source 380V, 60HZ,3 phase 22 Way Of Drive 1.2 inch single chain 23 Color Of The Machine Yellow and blue 24 Machine Type Iron Cast 25 Emergency switch In main machine and control panel all have emergency switch for forbid any urgently accident. 26 Protect cover Complete mobile safety cover from roll forming to the cutter.					
punching 17 Hydraulic pump brand 18 Cutting Hydraulic post-cutting for cut end product 19 Extra cutter One more cutter for each profile 20 Material Of Cutting Cr12Mov quenching 58-62°C 21 Electric Source 380V, 60HZ,3 phase 22 Way Of Drive 1.2 inch single chain 23 Color Of The Machine Yellow and blue 24 Machine Type Iron Cast 25 Emergency switch In main machine and control panel all have emergency switch for forbid any urgently accident. 26 Protect cover Complete mobile safety cover from roll forming to the cutter.		3			
17Hydraulic pump brandLichao18CuttingHydraulic post-cutting for cut end product19Extra cutterOne more cutter for each profile20Material Of CuttingCr12Mov quenching 58-62°C21Electric Source380V, 60HZ,3 phase22Way Of Drive1.2 inch single chain23Color Of The MachineYellow and blue24Machine TypeIron Cast25Emergency switchIn main machine and control panel all have emergency switch for forbid any urgently accident.26Protect coverComplete mobile safety cover from roll forming to the cutter.	16	, ,	22Tons		
18CuttingHydraulic post-cutting for cut end product19Extra cutterOne more cutter for each profile20Material Of CuttingCr12Mov quenching 58-62°C21Electric Source380V, 60HZ,3 phase22Way Of Drive1.2 inch single chain23Color Of The MachineYellow and blue24Machine TypeIron Cast25Emergency switchIn main machine and control panel all have emergency switch for forbid any urgently accident.26Protect coverComplete mobile safety cover from roll forming to the cutter.					
19 Extra cutter One more cutter for each profile 20 Material Of Cutting Cr12Mov quenching 58-62°C 21 Electric Source 380V, 60HZ,3 phase 22 Way Of Drive 1.2 inch single chain 23 Color Of The Machine Yellow and blue 24 Machine Type Iron Cast 25 Emergency switch In main machine and control panel all have emergency switch for forbid any urgently accident. 26 Protect cover Complete mobile safety cover from roll forming to the cutter.					
20 Material Of Cutting Cr12Mov quenching 58-62°C 21 Electric Source 380V, 60HZ,3 phase 22 Way Of Drive 1.2 inch single chain 23 Color Of The Machine Yellow and blue 24 Machine Type Iron Cast 25 Emergency switch In main machine and control panel all have emergency switch for forbid any urgently accident. 26 Protect cover Complete mobile safety cover from roll forming to the cutter.		Cutting			
21 Electric Source 380V, 60HZ,3 phase 22 Way Of Drive 1.2 inch single chain 23 Color Of The Machine Yellow and blue 24 Machine Type Iron Cast 25 Emergency switch In main machine and control panel all have emergency switch for forbid any urgently accident. 26 Protect cover Complete mobile safety cover from roll forming to the cutter.		Extra cutter	One more cutter for each profile		
22Way Of Drive1.2 inch single chain23Color Of The MachineYellow and blue24Machine TypeIron Cast25Emergency switchIn main machine and control panel all have emergency switch for forbid any urgently accident.26Protect coverComplete mobile safety cover from roll forming to the cutter.					
23 Color Of The Machine 24 Machine Type 25 Emergency switch 26 Protect cover 27 Color Of The Machine 28 Yellow and blue 29 Iron Cast 29 In main machine and control panel all have emergency switch for forbid any urgently accident. 20 Complete mobile safety cover from roll forming to the cutter.		Electric Source			
24Machine TypeIron Cast25Emergency switchIn main machine and control panel all have emergency switch for forbid any urgently accident.26Protect coverComplete mobile safety cover from roll forming to the cutter.					
25 Emergency switch In main machine and control panel all have emergency switch for forbid any urgently accident. 26 Protect cover Complete mobile safety cover from roll forming to the cutter.					
switch for forbid any urgently accident. 26 Protect cover Complete mobile safety cover from roll forming to the cutter.					
26 Protect cover Complete mobile safety cover from roll forming to the cutter.	25	Emergency switch	In main machine and control panel all have emergency		
cutter.					
	26	Protect cover	Complete mobile safety cover from roll forming to the		
27 Size of the machine L*W*H 12m*1.2m*1.2m					
	27	Size of the machine	L*W*H 12m*1.2m*1.2m		

28	Container Need	1 x40 feet (base on final)
	Container Need	i Ato icci (basc on iniai)

The steel door frame roll forming machine is a complete product line. After roll forming by our production line, we could make very smooth and beautiful steel door frame without any scratch on surface.

Machine picture display

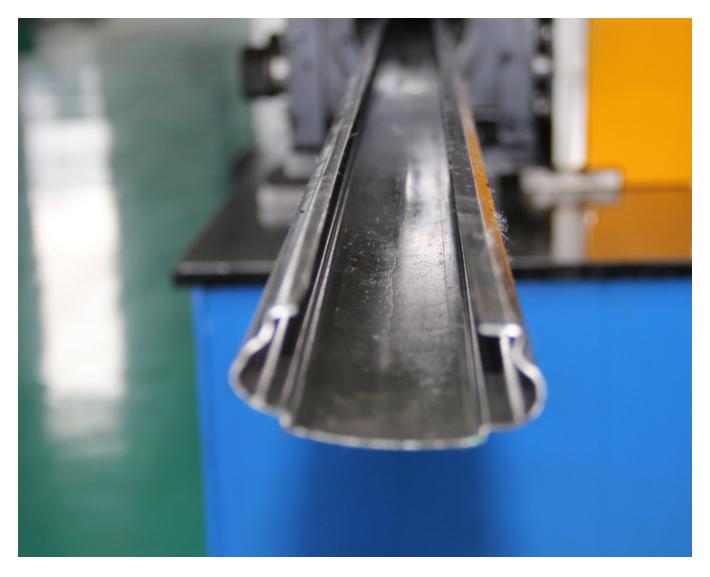

Packaging Details:

- 1. Machine is covered by plastic film.
- 2. PLC control box, spare parts and other small parts are packed by wooden carton box.

Terms:

- 1. Delivery: within 60 days after receiving the deposit.
- 2. Package: export standard package for container.
- 3. Payment: TT (30% by TT in advance, 70% by TT after inspect the machine before delivery).

Product link: https://www.toprollformingmachine.com/?p=124668