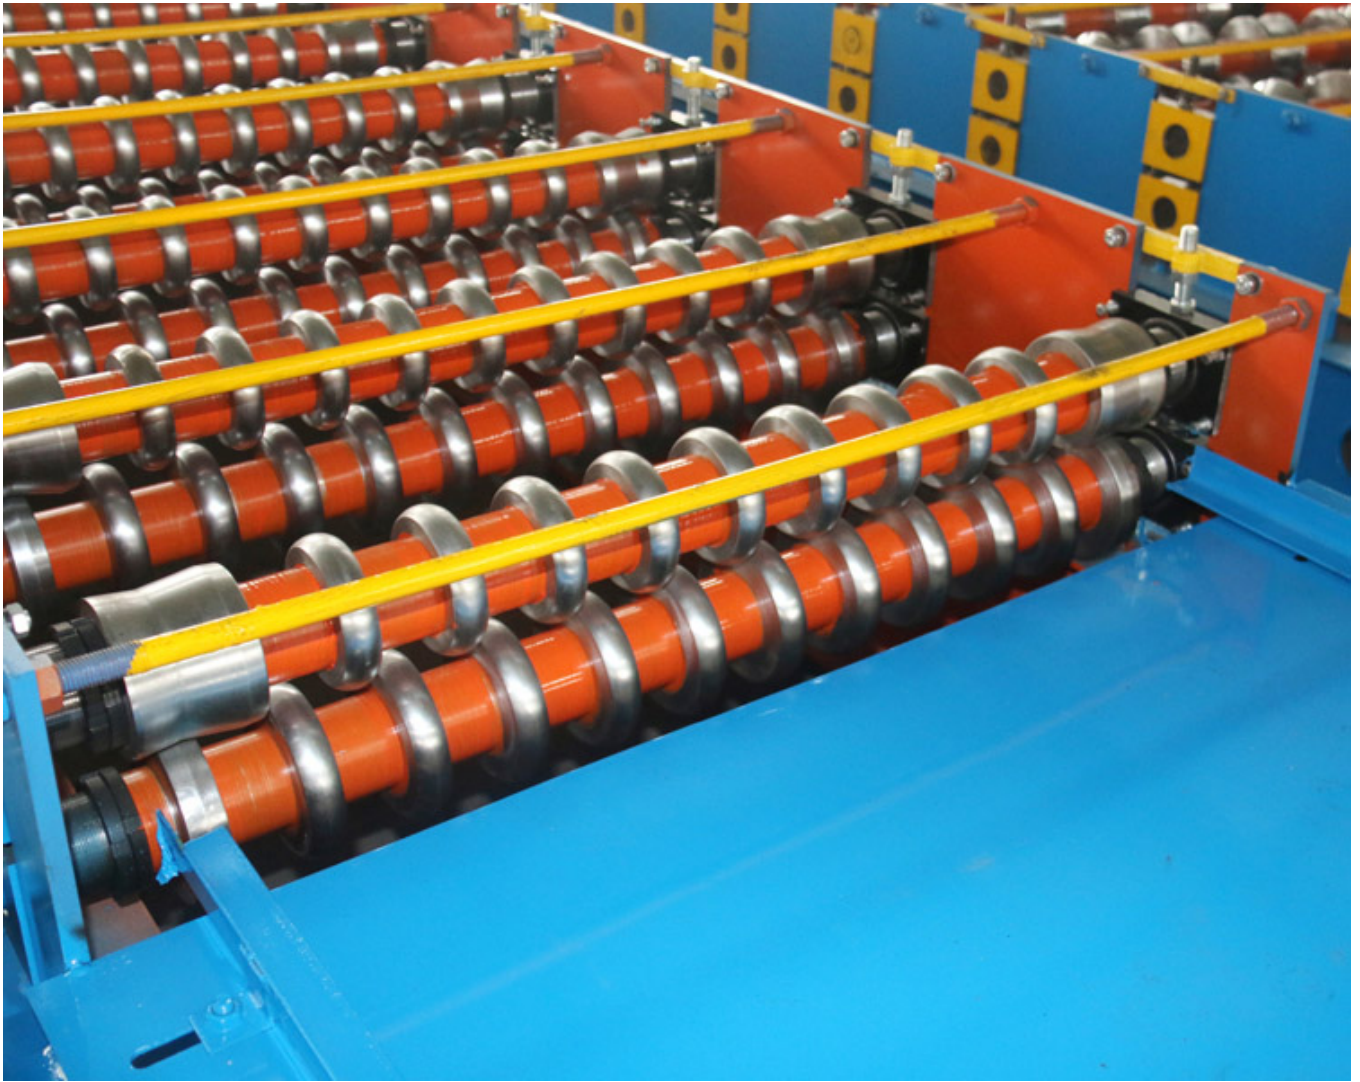

China wholesale T Bar Metal Grid - Corrugated Automatic Roof Tile Machine - Haixing Industrial

Parameters of corrugated automatic roof tile machine

| | | |
|----|-----------------------|-----------------------------------------------|
| 1 | Main motor power | 4kW, 3-phase or as your requests |
| 2 | Hydraulic motor power | 3kW |
| 3 | Hydraulic pressure | 10-12MPa |
| 4 | Voltage | 380V/3-phase/50Hz (or as your requirements) |
| 5 | Control system | PLC delta inverter |
| 6 | Mainframe | 300/350mm H-beam or 350mm |
| 7 | Backboard thickness | 16mm |
| 8 | Chain size | 1 Inch |
| 9 | Feeding material | color steel coils |
| 10 | Feeding thickness | 0.3-0.8mm |
| 11 | Feeding width | 1000mm |
| 12 | Effective width | 850mm |
| 13 | Productivity | 0-15/min |
| 14 | Roll station | 13 roll steps (according to different design) |
| 15 | Roller diameter | 70mm (depends on different design) |
| 16 | Roller material | 45# steel |
| 17 | Cutter material | Cr12 |
| 18 | Cr-plating size | 0.05mm |
| 19 | Overall size | 6800*1400*1150mm |
| 20 | Total weight | 4.8 tons |

The above are some of the parameters, more detailed parameters can be obtained by contacting us, some of which can be customized according to customer needs.

Detail of machine:



Packaging Details :

1. Machine is covered by plastic film.
2. PLC control box, spare parts and other small parts are packed by wooden carton box.

Product link : <https://www.toprollformingmachine.com/?p=13028>