## OEM Supply Pipe Roll Forming Machine -Best Price for European Standard Of Stainless Steel Door Frame Made Machine - Haixing Industrial

High quality Initial, and Buyer Supreme is our guideline to offer the ideal assistance to our shoppers. At present, we are striving our best to become amongst the ideal exporters inside our industry to satisfy shoppers more want for Best Price for European Standard Of Stainless Steel Door Frame Made Machine, We have expanded our business into Germany, Turkey, Canada, U. S. A., Indonesia, India, Nigeria, Brazil and some other regions of the world. We are working hard to be one of the best global suppliers.


High quality Initial, and Buyer Supreme is our guideline to offer the ideal assistance to our shoppers. At present, we are striving our best to become amongst the ideal exporters inside our industry to satisfy shoppers more want for <u>Galvanized Steel Door Frame Machine</u>, <u>Of Stainless Steel Door Frame</u>, <u>Stainless Steel Window Frame Making Machine</u>, With its rich manufacturing experience, high-quality products and solutions, and perfect after-sale service, the company has gained good reputation and has become one of the famous enterprise specialized in manufacturing series. We sincerely hope to establish business relation with you and pursue mutual benefit.

| Steel profile door frame roll forming machine parameters |                         |   |  |
|--|-------------------------|---|--|
| 1  | Material width          | 3 sizes. Waiting for buyer exactly profile                |  |
| 2  | How to adjust size      | Option: by PLC (It can be adjust by PLC and also in hand  |  |
|  | -                       | wheel)  |  |
|  |                         | One side fixed and the other is adjustable by manual or   |  |
|  |                         | PLC   |  |
| 3  | Base frame              | base frame 30 mm thick steel plate process the surface    |  |
|  |                         | on CNC planer to keep it leveling and drill bolts and key |  |
|  |                         | slot by CNC   |  |
| 4  | Rolling Speed           | 12-15m/min(not include cutting time)                      |  |
| 5  | Rolling Thickness       | 1.2-2.0mm   |  |
| 6  | Material                | GI or metal   |  |
| 7  | Control System          | PLC (Panasonic) as list in the note                       |  |
| 8  | decoiler                | 3 Ton manual decoiler                                     |  |
| 9  | Leveling                | Up in 3 roller, down in 4 roller                          |  |
| 10   | Roller Stations         | About 20 stations   |  |
| 11   | Roller Material         | Gcr15, coated with chrome HRC58-62 degree                 |  |
| 12   | Shaft Material and DIA  | ☐ 70mm, material is 45# forge steel                       |  |
| 13   | Maim Motor Power        | 11kw brake motor  |  |
| 14   | Hydraulic Station Power | 5.5kw   |  |
| 15   | Hydraulic Pressure      | 20Mpa   |  |
| 16   | Capacity of tonnage for | 22Tons  |  |
|  | punching                |   |  |
| 17   | Hydraulic pump brand    | Lichao  |  |
| 18   | Cutting                 | Hydraulic post-cutting for cut end product                |  |
| 19   | Extra cutter            | One more cutter for each profile                          |  |
| 20   | Material Of Cutting     | Cr12Mov quenching 58-62°C                                 |  |
| 21   | Electric Source         | 380V, 60HZ,3 phase  |  |
| 22   | Way Of Drive            | 1.2 inch single chain                                     |  |
| 23   | Color Of The Machine    | Yellow and blue   |  |
|  |                         |   |  |

| 24 | Machine Type        | Iron Cast   |
|----|---------------------|---|
| 25 | Emergency switch    | In main machine and control panel all have emergency  |
|    |                     | switch for forbid any urgently accident.              |
| 26 | Protect cover       | Complete mobile safety cover from roll forming to the |
|    |                     | cutter.   |
| 27 | Size of the machine | L*W*H 12m*1.2m*1.2m                                   |
| 28 | Container Need      | 1 x40 feet (base on final)                            |

The steel door frame roll forming machine is a complete product line. After roll forming by our production line, we could make very smooth and beautiful steel door frame without any scratch on surface.

## Machine picture display

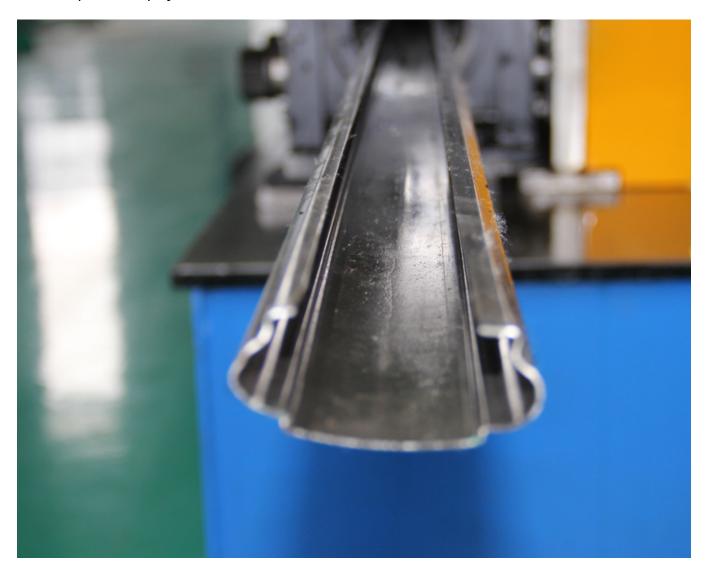

## Packaging Details:

- 1. Machine is covered by plastic film.
- 2. PLC control box, spare parts and other small parts are packed by wooden carton box.

## Terms:

- 1. Delivery: within 60 days after receiving the deposit.
- 2. Package: export standard package for container.
- 3. Payment: TT (30% by TT in advance, 70% by TT after inspect the machine before delivery).

Product link: <a href="https://www.toprollformingmachine.com/?p=134384">https://www.toprollformingmachine.com/?p=134384</a>