Wholesale Price China Metal Glazed Roof Tile Roll Forming Machine -

Factory directly Russia Popular Safety Door Frame Omega Keel Roller Form Machinery Machines - Haixing Industrial


Our organization has been focusing on brand strategy. Customers' gratification is our greatest advertising. We also source OEM provider for Factory directly Russia Popular Safety Door Frame Omega Keel Roller Form Machinery Machines, We give priority to high quality and customer fulfillment and for this we follow stringent good quality control measures. We have now in-house testing facilities where our goods are tested on every single aspect at different processing stages. Owning to latest technologies, we facilitate our shoppers with custom made manufacturing facility. Our organization has been focusing on brand strategy. Customers' gratification is our greatest advertising. We also source OEM provider for Door Frame Machine, Door Frame Omega Keel Roller Machine, Door Frame Roller Machine, We follow up the career and aspiration of our elder generation, and we have been eager to open up a new prospect in this field, We insist on "Integrity, Profession, Win-win Cooperation", because we have a strong backup, that are excellent partners with advanced manufacturing lines, abundant technical strength, standard inspection system and good production capacity.

1 Material width 3 sizes. Waiting for buyer exactly profile 2 How to adjust size Option : by PLC (It can be adjust by PLC and also in hand wheel)	Steel profile door frame roll forming machine parameters			
How to adjust size	1	i .		
One side fixed and the other is adjustable by manual or PLC 3 Base frame base frame 30 mm thick steel plate process the surface on CNC planer to keep it leveling and drill bolts and key slot by CNC 4 Rolling Speed 12-15m/min(not include cutting time) 5 Rolling Thickness 1.2-2.0mm 6 Material GI or metal 7 Control System PLC (Panasonic) as list in the note 8 decoiler 3 Ton manual decoiler 9 Leveling Up in 3 roller, down in 4 roller 10 Roller Stations About 20 stations 11 Roller Material Gcr15, coated with chrome HRC58-62 degree 12 Shaft Material and DIA 70mm, material is 45# forge steel 13 Maim Motor Power 11kw brake motor 14 Hydraulic Station Power 5.5kw 15 Hydraulic Pressure 20Mpa 16 Capacity of tonnage for punching 17 Hydraulic pump brand Lichao 18 Cutting Hydraulic post-cutting for cut end product 19 Extra cutter One more cutter for each profile 20 Material Of Cutting Cr12Mov quenching 58-62°C 21 Electric Source 380V, 60HZ,3 phase	2	How to adjust size	Option : by PLC (It can be adjust by PLC and also in hand	
Base frame base frame 30 mm thick steel plate process the surface on CNC planer to keep it leveling and drill bolts and key slot by CNC 4 Rolling Speed 12-15m/min(not include cutting time) 5 Rolling Thickness 1.2-2.0mm 6 Material GI or metal 7 Control System PLC (Panasonic) as list in the note 8 decoiler 3 Ton manual decoiler 9 Leveling Up in 3 roller, down in 4 roller 10 Roller Stations About 20 stations 11 Roller Material Gcr15, coated with chrome HRC58-62 degree 12 Shaft Material and DIA Gr75, coated with chrome HRC58-62 degree 13 Maim Motor Power 11kw brake motor 14 Hydraulic Station Power 5.5kw 15 Hydraulic Pressure 20Mpa 16 Capacity of tonnage for punching 17 Hydraulic pump brand Lichao 18 Cutting Hydraulic post-cutting for cut end product 19 Extra cutter One more cutter for each profile 20 Material Of Cutting Cr12Mov quenching 58-62°C 21 Electric Source 380V, 60HZ,3 phase		-	wheel)	
Base frame base frame 30 mm thick steel plate process the surface on CNC planer to keep it leveling and drill bolts and key slot by CNC 4 Rolling Speed 12-15m/min(not include cutting time) 5 Rolling Thickness 1.2-2.0mm 6 Material GI or metal 7 Control System PLC (Panasonic) as list in the note 8 decoiler 3 Ton manual decoiler 9 Leveling Up in 3 roller, down in 4 roller 10 Roller Stations About 20 stations 11 Roller Material Gcr15, coated with chrome HRC58-62 degree 12 Shaft Material and DIA Tomm, material is 45# forge steel 13 Maim Motor Power 11kw brake motor 14 Hydraulic Station Power 5.5kw 15 Hydraulic Pressure 20Mpa 16 Capacity of tonnage for punching 17 Hydraulic pump brand Lichao 18 Cutting Hydraulic post-cutting for cut end product 19 Extra cutter One more cutter for each profile 20 Material Of Cutting Cr12Mov quenching 58-62°C 21 Electric Source 380V, 60HZ,3 phase			One side fixed and the other is adjustable by manual or	
on CNC planer to keep it leveling and drill bolts and key slot by CNC 4 Rolling Speed 12-15m/min(not include cutting time) 5 Rolling Thickness 1.2-2.0mm 6 Material GI or metal 7 Control System PLC (Panasonic) as list in the note 8 decoiler 3 Ton manual decoiler 9 Leveling Up in 3 roller, down in 4 roller 10 Roller Stations About 20 stations 11 Roller Material Gcr15, coated with chrome HRC58-62 degree 12 Shaft Material and DIA Tomm, material is 45# forge steel 13 Maim Motor Power 11kw brake motor 14 Hydraulic Station Power 5.5kw 15 Hydraulic Pressure 20Mpa 16 Capacity of tonnage for punching 17 Hydraulic pump brand Lichao 18 Cutting Hydraulic post-cutting for cut end product 19 Extra cutter One more cutter for each profile 20 Material Of Cutting Cr12Mov quenching 58-62°C 21 Electric Source 380V, 60HZ,3 phase			i = 7	
Slot by CNC	3	Base frame	· ·	
4 Rolling Speed 12-15m/min(not include cutting time) 5 Rolling Thickness 1.2-2.0mm 6 Material GI or metal 7 Control System PLC (Panasonic) as list in the note 8 decoiler 3 Ton manual decoiler 9 Leveling Up in 3 roller, down in 4 roller 10 Roller Stations About 20 stations 11 Roller Material Gcr15, coated with chrome HRC58-62 degree 12 Shaft Material and DIA 70mm, material is 45# forge steel 13 Maim Motor Power 11kw brake motor 14 Hydraulic Station Power 5.5kw 15 Hydraulic Pressure 20Mpa 16 Capacity of tonnage for punching 17 Hydraulic pump brand Lichao 18 Cutting Hydraulic post-cutting for cut end product 19 Extra cutter One more cutter for each profile 20 Material Of Cutting Cr12Mov quenching 58-62°C 21 Electric Source 380V, 60HZ,3 phase			, , , , , , , , , , , , , , , , , , , ,	
5Rolling Thickness1.2-2.0mm6MaterialGI or metal7Control SystemPLC (Panasonic) as list in the note8decoiler3 Ton manual decoiler9LevelingUp in 3 roller, down in 4 roller10Roller StationsAbout 20 stations11Roller MaterialGcr15, coated with chrome HRC58-62 degree12Shaft Material and DIA70mm, material is 45# forge steel13Maim Motor Power11kw brake motor14Hydraulic Station Power5.5kw15Hydraulic Pressure20Mpa16Capacity of tonnage for punching22Tons17Hydraulic pump brandLichao18CuttingHydraulic post-cutting for cut end product19Extra cutterOne more cutter for each profile20Material Of CuttingCr12Mov quenching 58-62°C21Electric Source380V, 60HZ,3 phase				
6 Material GI or metal 7 Control System PLC (Panasonic) as list in the note 8 decoiler 3 Ton manual decoiler 9 Leveling Up in 3 roller, down in 4 roller 10 Roller Stations About 20 stations 11 Roller Material Gcr15, coated with chrome HRC58-62 degree 12 Shaft Material and DIA 70mm, material is 45# forge steel 13 Maim Motor Power 11kw brake motor 14 Hydraulic Station Power 5.5kw 15 Hydraulic Pressure 20Mpa 16 Capacity of tonnage for punching 17 Hydraulic pump brand Lichao 18 Cutting Hydraulic post-cutting for cut end product 19 Extra cutter One more cutter for each profile 20 Material Of Cutting Cr12Mov quenching 58-62°C 21 Electric Source 380V, 60HZ,3 phase				
7 Control System 8 decoiler 9 Leveling 10 Roller Stations 11 Roller Material 12 Shaft Material and DIA 13 Maim Motor Power 14 Hydraulic Station Power 15 Hydraulic Pressure 16 Capacity of tonnage for punching 17 Hydraulic pump brand 18 Cutting 19 Extra cutter 20 Material Of Cutting 21 Electric Source 21 Electric Source 21 Electric Source 21 Ton manual decoiler 20 Ton manual decoiler 3 Ton manual decoiler 4 Toller 4 Hydraulic 9 stations 4 Hydraulic 9 stations 4 Hydraulic 9 steel 4 Toller About 20 stations 4 Hydraulic 9 steel 4 Toller About 20 stations 4 Hydraulic 9 steel 4 Toller About 20 stations 4 Hydraulic 9 steel 4 Toller About 20 stations 4 Hydraulic 9 steel 4 Toller About 20 stations 4 Hydraulic 9 steel 4 Toller About 20 stations 4 Hydraulic 9 steel 4 Toller About 20 stations 4 Hydraulic 9 steel 4 Toller About 20 stations 4 Hydraulic 9 steel 4 Toller About 20 stations 4 Hydraulic 9 steel 4 Toller About 20 stations 4 Hydraulic 9 steel 4 Toller About 20 stations 4 Hydraulic 9 steel 4 Toller About 20 stations 4 Hydraulic 9 steel 4 Toller About 20 stations 4 Hydraulic 9 steel 4 Toller About 20 stations 4 Hydraulic 9 steel 4 Toller About 20 stations 5 Steel 6 Toller About 20 stations 7 Toller 4 Toller 4 Toller 20 stations 7 Toller 4 Toller 20 stations 8 Toller 4 Toller 20 stations 9 Toller 4 T				
8 decoiler 9 Leveling 10 Roller Stations 11 Roller Material 12 Shaft Material and DIA 13 Maim Motor Power 14 Hydraulic Station Power 15 Hydraulic Pressure 16 Capacity of tonnage for punching 17 Hydraulic pump brand 18 Cutting 19 Extra cutter 20 Material Of Cutting 21 Electric Source 3 Ton manual decoiler 10 Up in 3 roller, down in 4 roller 10 About 20 stations 10 About 20 stations 11 Hydrome HRC58-62 degree 11 Tomm, material is 45# forge steel 12 Tomm, material is 45# forge steel 13 Maim Motor Power 14 Hydraulic Station Power 15 Shw 16 Capacity of tonnage for punching 17 Hydraulic pump brand 18 Cutting 19 Cr12Mov quenching 58-62°C 20 Saov, 60HZ,3 phase				
9 Leveling Up in 3 roller, down in 4 roller 10 Roller Stations About 20 stations 11 Roller Material Gcr15, coated with chrome HRC58-62 degree 12 Shaft Material and DIA □ 70mm, material is 45# forge steel 13 Maim Motor Power 11kw brake motor 14 Hydraulic Station Power 5.5kw 15 Hydraulic Pressure 20Mpa 16 Capacity of tonnage for punching 17 Hydraulic pump brand Lichao 18 Cutting Hydraulic post-cutting for cut end product 19 Extra cutter One more cutter for each profile 20 Material Of Cutting Cr12Mov quenching 58-62°C 21 Electric Source 380V, 60HZ,3 phase		i	, ,	
10Roller StationsAbout 20 stations11Roller MaterialGcr15, coated with chrome HRC58-62 degree12Shaft Material and DIA□ 70mm, material is 45# forge steel13Maim Motor Power11kw brake motor14Hydraulic Station Power5.5kw15Hydraulic Pressure20Mpa16Capacity of tonnage for punching22Tons17Hydraulic pump brandLichao18CuttingHydraulic post-cutting for cut end product19Extra cutterOne more cutter for each profile20Material Of CuttingCr12Mov quenching 58-62°C21Electric Source380V, 60HZ,3 phase				
11 Roller Material Gcr15, coated with chrome HRC58-62 degree 12 Shaft Material and DIA ☐ 70mm, material is 45# forge steel 13 Maim Motor Power 11kw brake motor 14 Hydraulic Station Power 5.5kw 15 Hydraulic Pressure 20Mpa 16 Capacity of tonnage for punching 17 Hydraulic pump brand Lichao 18 Cutting Hydraulic post-cutting for cut end product 19 Extra cutter One more cutter for each profile 20 Material Of Cutting Cr12Mov quenching 58-62°C 21 Electric Source 380V, 60HZ,3 phase		<u> </u>		
12 Shaft Material and DIA ☐ 70mm, material is 45# forge steel 13 Maim Motor Power 11kw brake motor 14 Hydraulic Station Power 5.5kw 15 Hydraulic Pressure 20Mpa 16 Capacity of tonnage for punching 17 Hydraulic pump brand Lichao 18 Cutting Hydraulic post-cutting for cut end product 19 Extra cutter One more cutter for each profile 20 Material Of Cutting Cr12Mov quenching 58-62°C 21 Electric Source 380V, 60HZ,3 phase				
13Maim Motor Power11kw brake motor14Hydraulic Station Power5.5kw15Hydraulic Pressure20Mpa16Capacity of tonnage for punching22Tons17Hydraulic pump brandLichao18CuttingHydraulic post-cutting for cut end product19Extra cutterOne more cutter for each profile20Material Of CuttingCr12Mov quenching 58-62°C21Electric Source380V, 60HZ,3 phase				
14Hydraulic Station Power5.5kw15Hydraulic Pressure20Mpa16Capacity of tonnage for punching22Tons17Hydraulic pump brandLichao18CuttingHydraulic post-cutting for cut end product19Extra cutterOne more cutter for each profile20Material Of CuttingCr12Mov quenching 58-62°C21Electric Source380V, 60HZ,3 phase				
15 Hydraulic Pressure 20Mpa 16 Capacity of tonnage for punching 17 Hydraulic pump brand Lichao 18 Cutting Hydraulic post-cutting for cut end product 19 Extra cutter One more cutter for each profile 20 Material Of Cutting Cr12Mov quenching 58-62°C 21 Electric Source 380V, 60HZ,3 phase				
16 Capacity of tonnage for punching 17 Hydraulic pump brand 18 Cutting Hydraulic post-cutting for cut end product 19 Extra cutter One more cutter for each profile 20 Material Of Cutting Cr12Mov quenching 58-62°C 21 Electric Source 380V, 60HZ,3 phase				
punching 17 Hydraulic pump brand 18 Cutting Hydraulic post-cutting for cut end product 19 Extra cutter One more cutter for each profile 20 Material Of Cutting Cr12Mov quenching 58-62°C 21 Electric Source 380V, 60HZ,3 phase			•	
17Hydraulic pump brandLichao18CuttingHydraulic post-cutting for cut end product19Extra cutterOne more cutter for each profile20Material Of CuttingCr12Mov quenching 58-62°C21Electric Source380V, 60HZ,3 phase	16		22Tons	
18CuttingHydraulic post-cutting for cut end product19Extra cutterOne more cutter for each profile20Material Of CuttingCr12Mov quenching 58-62°C21Electric Source380V, 60HZ,3 phase		•		
19Extra cutterOne more cutter for each profile20Material Of CuttingCr12Mov quenching 58-62°C21Electric Source380V, 60HZ,3 phase				
20Material Of CuttingCr12Mov quenching 58-62°C21Electric Source380V, 60HZ,3 phase		Cutting		
21 Electric Source 380V, 60HZ,3 phase				
22 Way Of Drive 1.2 inch single chain				
	22	Way Of Drive	1.2 inch single chain	

23	Color Of The Machine	Yellow and blue
24	Machine Type	Iron Cast
25	Emergency switch	In main machine and control panel all have emergency
		switch for forbid any urgently accident.
26	Protect cover	Complete mobile safety cover from roll forming to the
		cutter.
27	Size of the machine	L*W*H 12m*1.2m*1.2m
28	Container Need	1 x40 feet (base on final)

The steel door frame roll forming machine is a complete product line. After roll forming by our production line, we could make very smooth and beautiful steel door frame without any scratch on surface.

Machine picture display

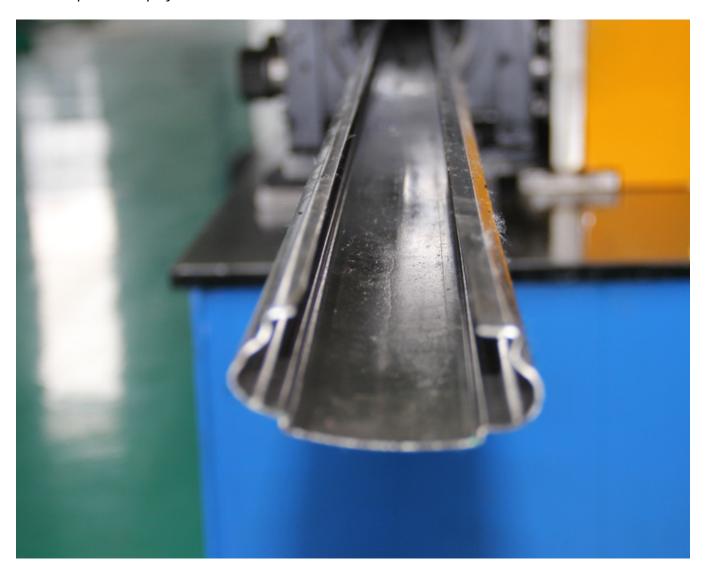

Packaging Details:

- 1. Machine is covered by plastic film.
- 2. PLC control box, spare parts and other small parts are packed by wooden carton box.

Terms:

- 1. Delivery: within 60 days after receiving the deposit.
- 2. Package: export standard package for container.
- 3. Payment: TT (30% by TT in advance, 70% by TT after inspect the machine before delivery).

Product link: https://www.toprollformingmachine.com/?p=135316