
Glazed roofing tile roll forming machine

The tiles pressed out by the glazed roofing tile roll forming machine are very beautiful, and the technical parameters of the machine are as follows:

| 1 | Main motor power | 4kW, 3-phase or as your requests |
|----|-----------------------|---|
| 2 | Hydraulic motor power | 3kW |
| 3 | Hydraulic pressure | 10-12MPa |
| 4 | Voltage | 380V/3-phase/50Hz (or as your requirements) |
| 5 | Control system | PLC delta inverter |
| 6 | Mainframe | 300/350mm H-beam or 350mm |
| 7 | Backboard thickness | 16mm |
| 8 | Chain size | 1 Inch |
| 9 | Feeding material | color steel coils |
| 10 | Feeding thickness | 0.3-0.8mm |
| 11 | Feeding width | 1000mm |
| 12 | Effective width | 836mm |
| 13 | Productivity | 0-15/min |
| 14 | Roll station | 13 roll steps (according to different design) |
| 15 | Roller diameter | 70mm (depends on different design) |
| 16 | Roller material | 45# steel |
| 17 | Cutter material | Cr12 |
| 18 | Cr-plating size | 0.05mm |
| 19 | Overall size | 6800*1400*1150mm |
| 20 | Total weight | 4.8 tons |

Glazed roofing tile roll forming machine components include: Manual un-coiler, Guiding platform, Coil strip leveler, Main machine of roll forming, Electric-motor, Cutting device, Hydraulic station, PLC control and Supporter table.

Machine Details:

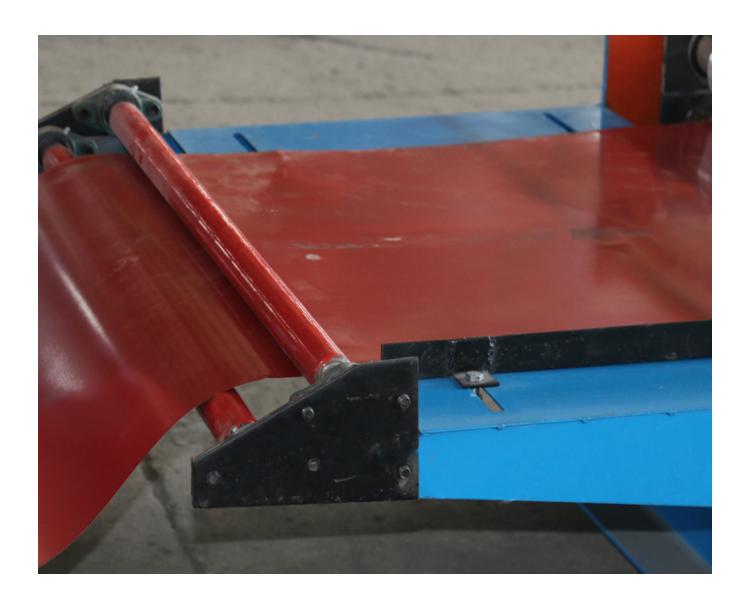

Packaging Details:

- 1. Machine is covered by plastic film.
- 2. PLC control box, spare parts and other small parts are packed by wooden carton box.

Product link: https://www.toprollformingmachine.com/?p=1435