
Steel Profile Door Frame Roll Forming Machine

Steel profile door frame roll forming machine parameters		
1	Material width	3 sizes. Waiting for buyer exactly profile
2	How to adjust size	Option : by PLC (It can be adjust by PLC and also in hand
	, ,	wheel)
		One side fixed and the other is adjustable by manual or
		PLC
3	Base frame	base frame 30 mm thick steel plate process the surface
		on CNC planer to keep it leveling and drill bolts and key
		slot by CNC
4	Rolling Speed	12-15m/min(not include cutting time)
5	Rolling Thickness	1.2-2.0mm
6	Material	GI or metal
7	Control System	PLC (Panasonic) as list in the note
8	decoiler	3 Ton manual decoiler
9	Leveling	Up in 3 roller, down in 4 roller
10	Roller Stations	About 20 stations
11	Roller Material	Gcr15, coated with chrome HRC58-62 degree
12	Shaft Material and DIA	70mm, material is 45# forge steel
13	Maim Motor Power	11kw brake motor
14	Hydraulic Station Power	5.5kw
15	Hydraulic Pressure	20Мра
16	Capacity of tonnage for	22Tons
	punching	
17	Hydraulic pump brand	Lichao
18	Cutting	Hydraulic post-cutting for cut end product
19	Extra cutter	One more cutter for each profile
20	Material Of Cutting	Cr12Mov quenching 58-62°C
21	Electric Source	380V, 60HZ,3 phase
22	Way Of Drive	1.2 inch single chain
23	Color Of The Machine	Yellow and blue
24	Machine Type	Iron Cast
25	Emergency switch	In main machine and control panel all have emergency
		switch for forbid any urgently accident.
26	Protect cover	Complete mobile safety cover from roll forming to the
		cutter.
27	Size of the machine	L*W*H 12m*1.2m*1.2m
28	Container Need	1 x40 feet (base on final)

The steel door frame roll forming machine is a complete product line. After roll forming by our production line, we could make very smooth and beautiful steel door frame without any scratch on surface.

Machine picture display

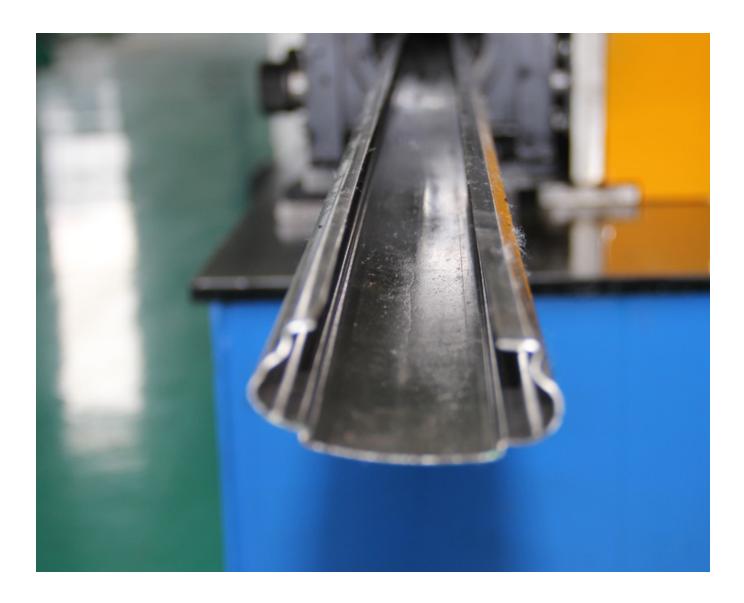

Packaging Details :

- 1. Machine is covered by plastic film.
- 2. PLC control box, spare parts and other small parts are packed by wooden carton box.

Terms:

- 1. Delivery: within 60 days after receiving the deposit.
- 2. Package: export standard package for container.
- 3. Payment: TT (30% by TT in advance, 70% by TT after inspect the machine before delivery).

Product link : <u>https://www.toprollformingmachine.com/?p=1583</u>