

---

## Online Exporter Double Layer Roofing Sheet Roll Forming Machine

The pretty loaded projects management experiences and one to a person support model make the high importance of business enterprise communication and our easy understanding of your expectations for Online Exporter Double Layer Roofing Sheet Roll Forming Machine, For those who pursuit the Hi-quality, Hi-stable, Aggressive price components, organization name is your greatest choice!

The pretty loaded projects management experiences and one to a person support model make the high importance of business enterprise communication and our easy understanding of your expectations for [Cold Roll Forming Machine](#), [Double Layer Roof Plate Tile Making Machine](#), [Double Layer Roofing Sheet Roll Forming Machine](#), We severely promise that we give all the customers with the best quality products and solutions, the most competitive prices and the most prompt delivery. We hope to win a resplendent future for customers and ourselves.


Parameters of steel double layer roll forming machine

|    |                       |   |
|----|-----------------------|---|
| 1  | Main motor power      | 4kW, 3-phase or as your requests              |
| 2  | Hydraulic motor power | 3kW   |
| 3  | Hydraulic pressure    | 10-12MPa                                      |
| 4  | Voltage               | 380V/3-phase/50Hz (or as your requirements)   |
| 5  | Control system        | PLC delta inverter                            |
| 6  | Mainframe             | 300/350mm H-beam or 350mm                     |
| 7  | Backboard thickness   | 16mm  |
| 8  | Chain size            | 1 Inch  |
| 9  | Feeding material      | color steel coils                             |
| 10 | Feeding thickness     | 0.3-0.8mm                                     |
| 11 | Feeding width         | 1000mm  |
| 12 | Effective width       | 840mm, 850mm                                  |
| 13 | Productivity          | 0-15/min                                      |
| 14 | Roll station          | 13 roll steps (according to different design) |
| 15 | Roller diameter       | 70mm (depends on different design)            |
| 16 | Roller material       | 45# steel                                     |
| 17 | Cutter material       | Cr12  |
| 18 | Cr-plating size       | 0.05mm  |
| 19 | Overall size          | 6800*1400*1150mm                              |
| 20 | Total weight          | 4.8 tons                                      |

Terms:

1. Delivery: within 60 days after receiving the deposit.
2. Package: export standard package for container.
3. Payment: TT (30% by TT in advance, 70% by TT after inspect the machine before delivery).

We are committed to research and develop this industry for more than 20 years, and our productions are widely used in gardens, factories, resorts, hotels, exhibition halls, vacation lands, ancient architectures and modern villas.

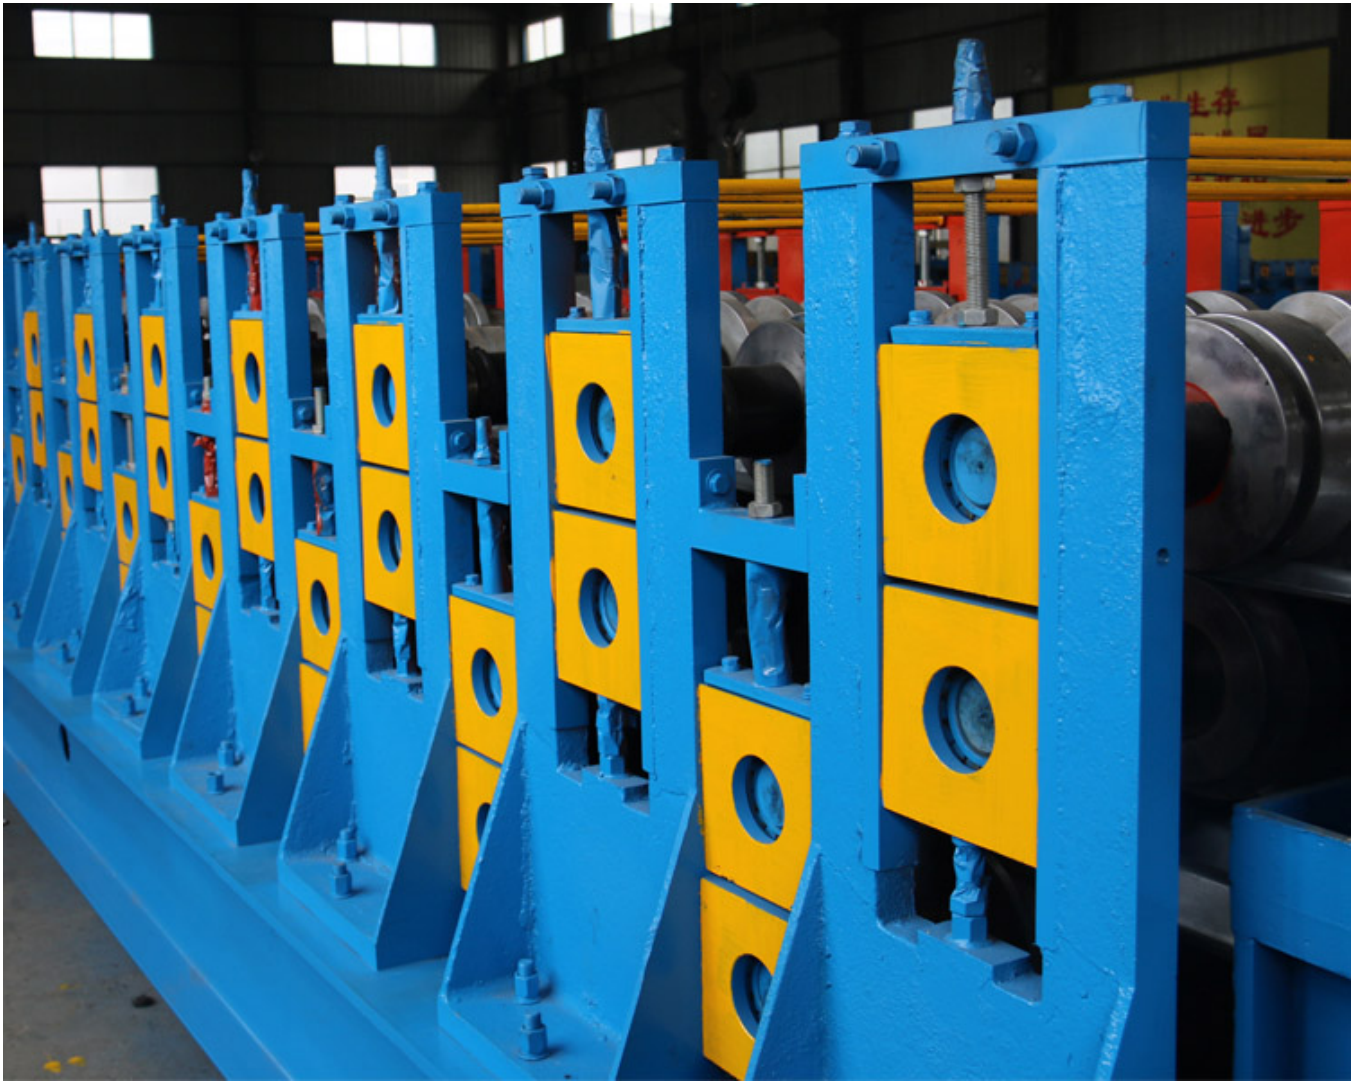

---

Product link : <https://www.toprollformingmachine.com/?p=171702>