


Corrugated Metal Roof Sheet Tile Making Machine

Corrugated Metal Roof Sheet Tile Making Machine parameters:

1	Main motor power	4kW, 3 phase or as your requests
2	Hydraulic motor power	3kW
3	Hydraulic pressure	10-12MPa
4	Voltage	380V/ 3 phase/ 50 Hz (or as your requirements)
5	Control system	PLC delta inverter
6	Main frame	300/350 mm H-beam
7	Backboard thickness	16 mm
8	Chain size	1 Inch
9	Feeding material	color steel coils
10	Feeding thickness	0.3-0.8 mm
11	Productivity	0-15/ min
12	Roll station	13 roll steps (according to different design)
13	Roller diameter	70 mm (depends on different design)
14	Roller material	45# steel
15	Cutter material	Cr12
16	Cr-plating size	0.05 mm

Popular drawing of corrugated roof metal sheets:

762 drawing, 850 drawing, 836 drawing, 1032 drawing

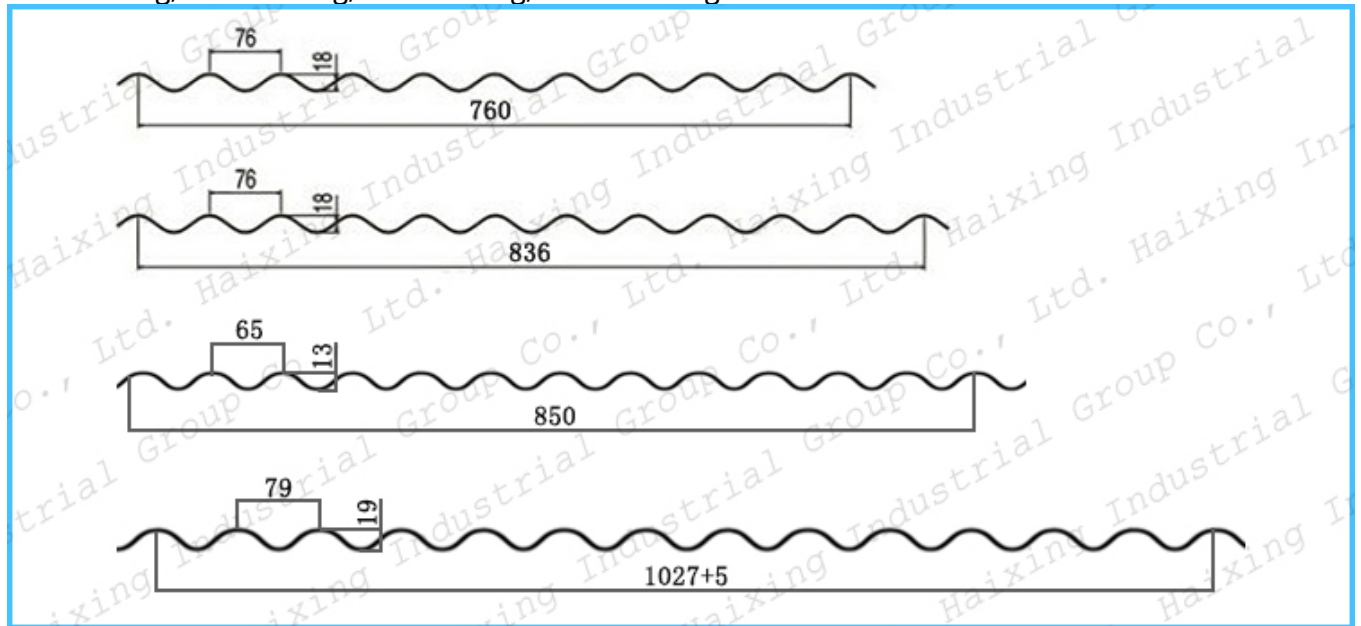

Different parts of the machine:

Decoiler: common machine with 5 tons manual decoiler or you also can choose electric decoiler or hydraulic decoiler



PLC control console:



Cutting parts: common is hydraulic pump drive cutting or you can choose electric motor drive cutting as follows:




Our Advantage:


1. Our machine motor are GERMAN BRAND SEMENS;
2. Our roller spacer are 4 mm thick seamless steel pipe;

-
3. Our output table can be adjust height according customer demands;
 4. Our PLC control console can be look around 360 degree;
 5. All easy-broken pars can be change within 14 month in free.

Other relative roof roll forming machine:

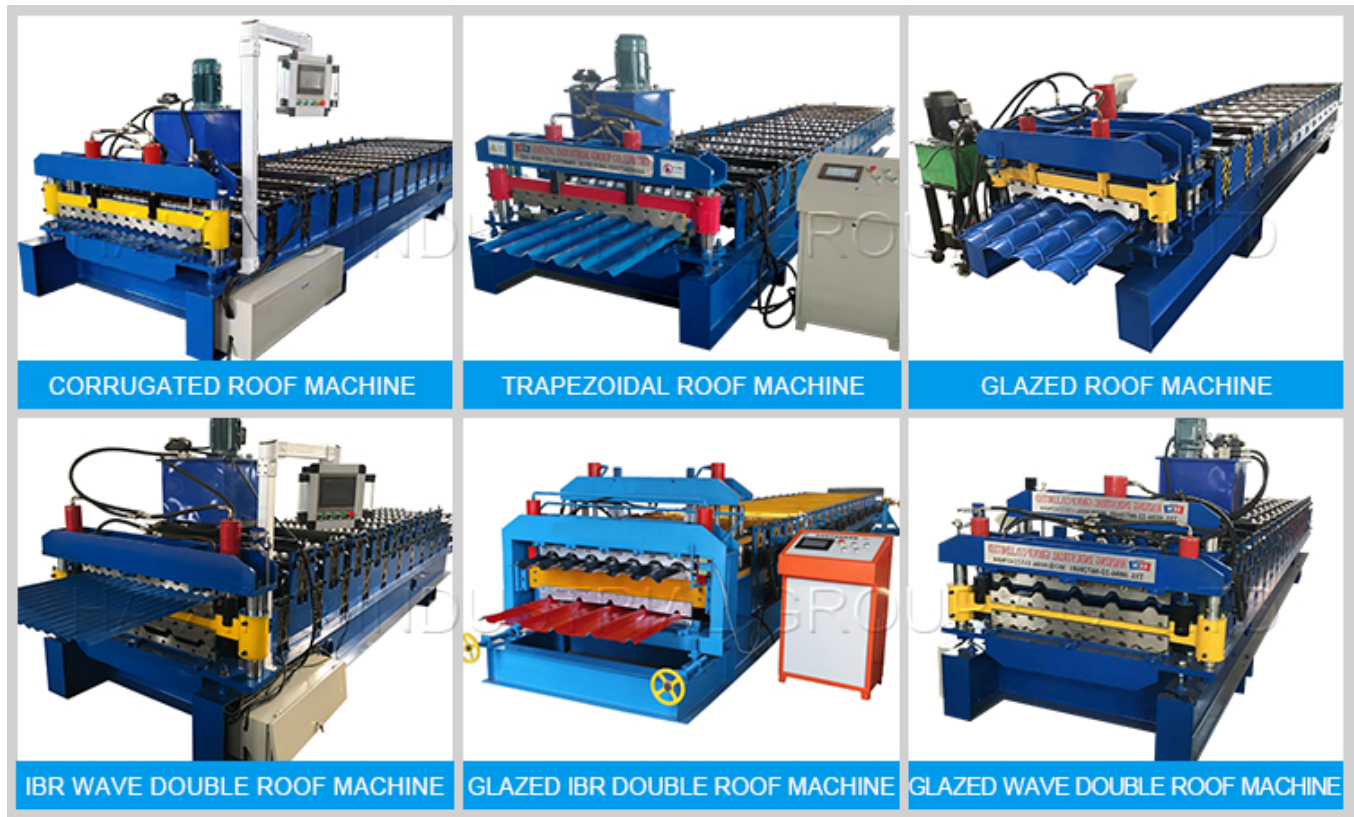

Relative raw material:

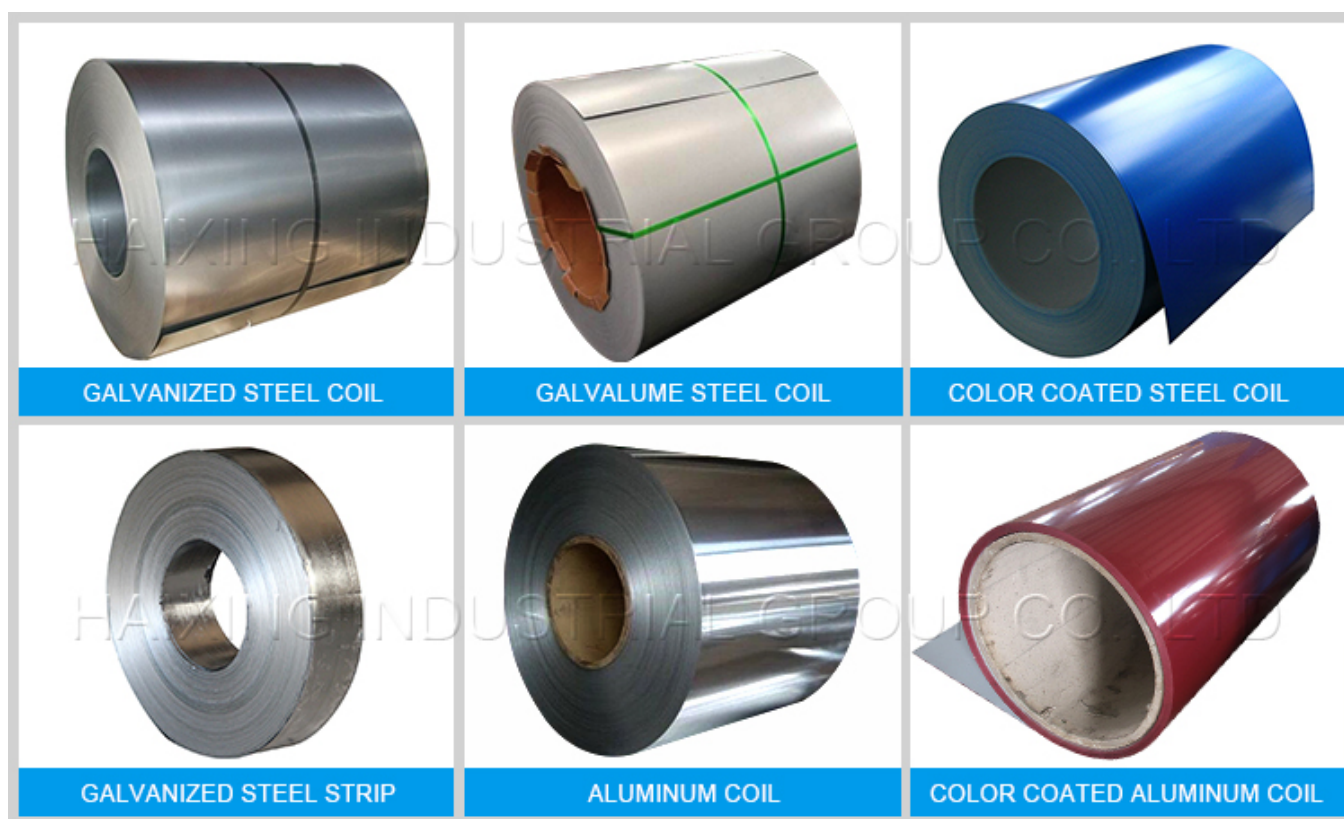

Packaging Details:

1. Main machine is covered by plastic film.
2. PLC control box, spare parts and other small parts are packed by wooden carton box.



Sales Service:

1. we provide the technical support for whole life of our roof roll forming machines.
2. If buyers need the technician to go abroad, we will arrange the technician, but the buyers should take all the cost, including visa, round trip ticket etc.

Product link : <https://www.toprollformingmachine.com/?p=172623>