



---

## T sharp aluminum roof making machine

T sharp aluminum roof making machine parameters

Hydraulic pressure	10-12MPa according to oil pump and pump motor	Main motor power	4/5.5
Voltage	380V/ 3 phase/ 50 Hz (or as your requirements)	Hydraulic motor power	3/4/
Main frame	350/400H beams according to machine demands	Control system	Au
Wall sheet thickness	16/18/20/22mm according to machine demands	Feeding thickness	
Feeding material	Galvanized steel coil/color steel coil/aluminum steel coil	Roller material	
Productivity	0 - 25m/min (according to machine specification)	Cutter material	
Roll station	Common 11 or 25rolls (according to different design)	Cr-plating size	
Roller diameter	70/75/80mm (depends on different design)	Chain size	1/1.2inch

Final product display

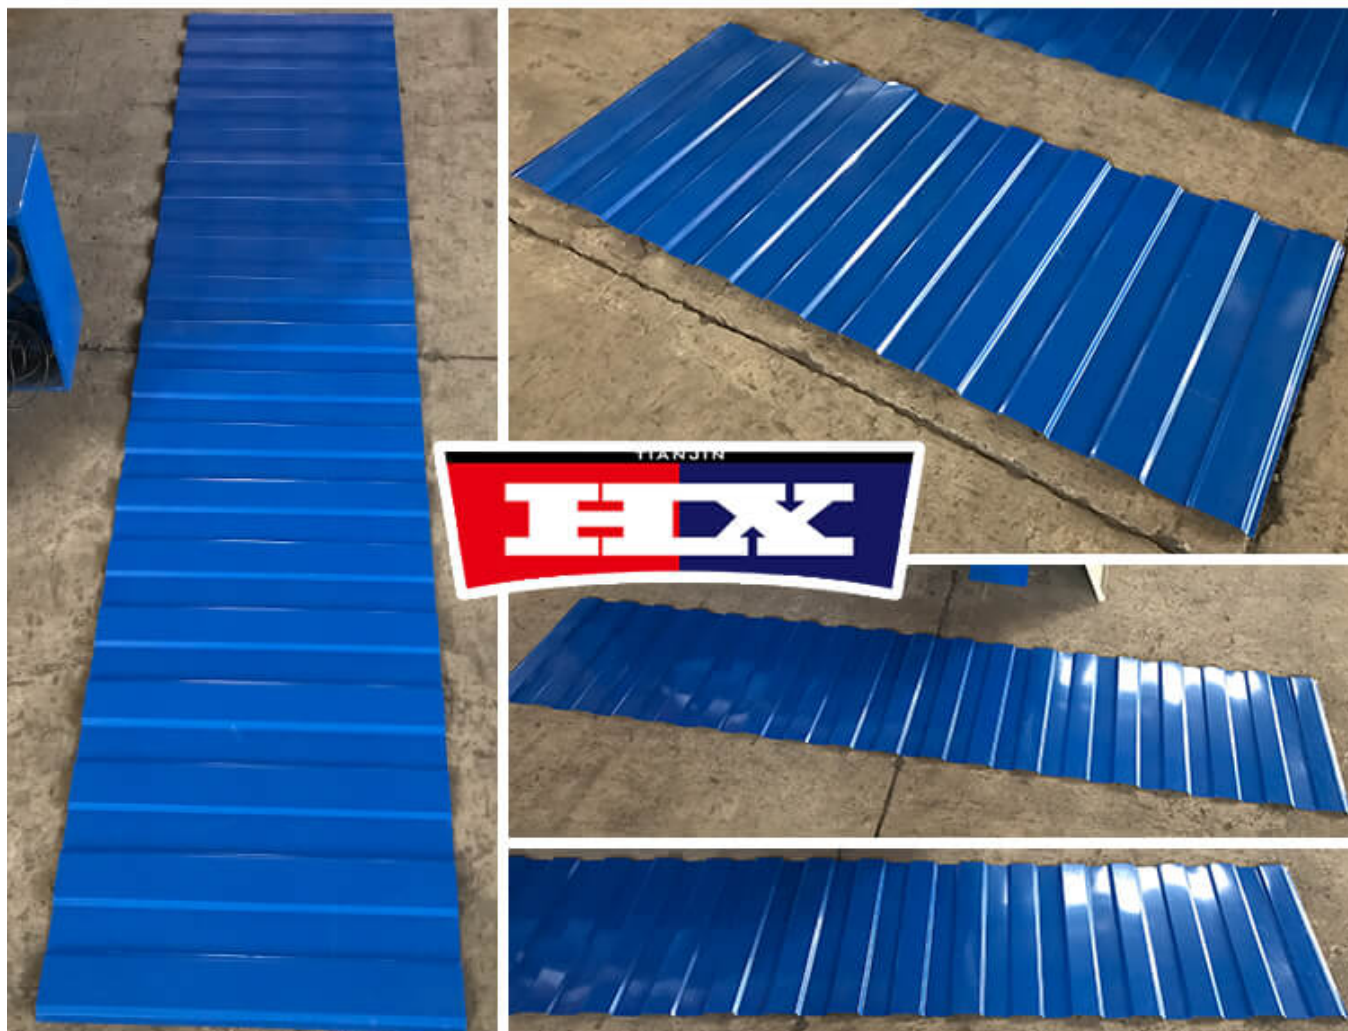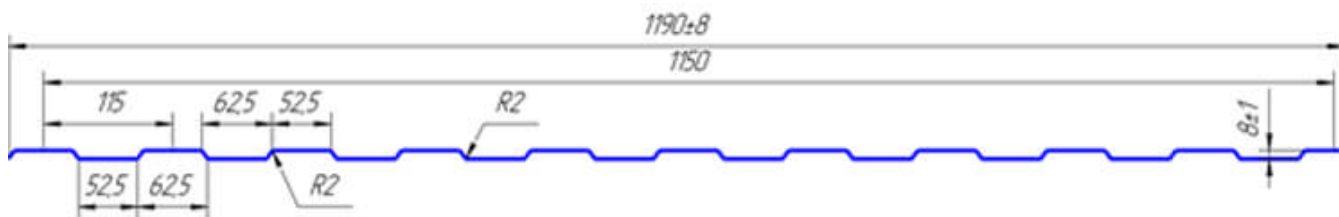

Main details of T sharp aluminum roof making machine





We offer our customers easy-broken parts for free.



Application



Roof roll forming machinery could produce metallic roofing tile, trapezoidal or sinusoidal roofing sheet, floor deck, C and Z purlin, expressway guardrail, channel and stud, roller shutter and sandwich panel, etc. Customized profiles and requirements are acceptable, and assistant equipment such as hydraulic decoiler, auto stacker, etc.

#### Packaging details

1. T sharp aluminum roof making machine are nude packing (If you need, we can also packed it with water-proof plastic).
2. PLC control system and motor pump are packed with waterproof paper, spare parts in a carton box.
3. One set of machine needs a 40' container to shipping.



Product link : <https://www.toprollformingmachine.com/?p=365262>