Best Price for Filter Paper Slitting Machinery

The key to our success is "Good Product Quality, Reasonable Value and Efficient Service" for Best Price for Filter Paper Slitting Machinery, We sincerely welcome abroad customers to consult to the long-term cooperation as well as the mutual advancement.

The key to our success is "Good Product Quality, Reasonable Value and Efficient Service" for <u>Filter Paper Pleating Machine</u>, <u>Paper Counting Machine</u>, <u>Slitting Marking Machine</u>, As an experienced factory we also accept customized order and make it same as your picture or sample specifying specification and customer design packing. The main goal of the company is to live a satisfactory memory to all the customers, and establish a long term win-win business relationship. For more information, remember to contact us. And it's our great pleasure if you like to have a personally meeting in our office.


Slitting machine line cuts the metal coil into strips of various widths required, and then collects the strip into small rolls for use in the next process.

| | | Slitting line machine parameters |
|-----------------------|----|---|
| Raw Material (if the | 1 | Material: carbon steel and others |
| material is stainless | 2 | The thickness of the material: 0.4mm-6mm. |
| steel, please tell in | 3 | Width: 10mm, 12mm, 15mm, 20mm, 25mm, 30mm, 40mm, 50mm, 60mm |
| advance) | 4 | Input width: 600-1600mm |
| Hydraulic decoiler | 1 | The inner size: 450610mm |
| with car | 2 | The Max width: 1250mm |
| | 3 | The capacity: 15T 20Ton or more |
| Flatting and Cutting | 1 | 2 shafts for feeding coil, 9 shafts for flatting |
| System | 2 | material of flatting: 42CrMo heat treated 50-52. |
| | 3 | hydraulic system. |
| | 4 | 2 sets cutting blade |
| | 5 | width of cutting: 600mm1220mm. |
| | 6 | the material of blade mould: Gr12MoV |
| | 7 | power: 22KW Motor with ZQ650 Reducer |
| Slitting system | 1 | The width range: 2001300mm |
| | 2 | The precious of the width: ±1mm |
| | 3 | The speed of slitting: 25m/min |
| | 4 | The width can be change. |
| | 5 | Material of the slitting: Cr12MoV. |
| | 6 | Hardness of slitting blade: HRC5860. |
| | 7 | Slitting: 2~3mm 6 lines. |
| | 8 | Quantity of blades: 10 sets. |
| | 9 | Width of side scrap: 3-15mm |
| | 10 | The precious of side scrap: ±0.5mm |
| | 11 | Quantity of side scrap: 2 strips |
| | 12 | Power of the slitting: 37KW, 1000r/min, with ZQ750 Reducer. |
| Control System | 1 | Screen: 3.2inch button screen |
| | 2 | PLC: Delta |
| Electrical collecting | 1 | Material inner: 550-650mm |
| machine with car | 2 | Max Coil width: 1500mm |
| | 3 | Carrying capacity: 5T |
| | 4 | Automatic relax or collect |
| | 5 | Power: 22KW |

Working process

Decoiler ----flatting and cutting----flatting and collecting

work process

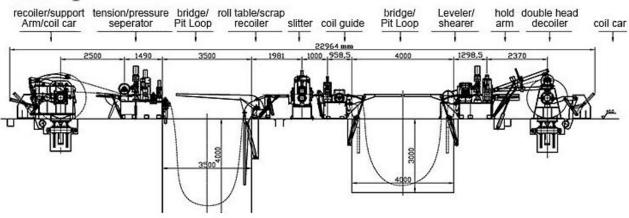

Machine picture display



| Packaging Details? |
|---|
| |
| |
| |
| 1. Machine is covered by plastic film. |
| |
| 2. PLC control box, spare parts and other small parts are packed by wooden carton box. |
| 2. PLC control box, spare parts and other small parts are packed by wooden carton box. Product link: https://www.toprollformingmachine.com/?p=46088 |
| |
| |
| |
| |