## High reputation Cnc Type Condenser Aluminum Header Pipe Slitting Machine

The consumer fulfillment is our primary goal. We uphold a consistent level of professionalism, top quality, credibility and service for High reputation Cnc Type Condenser Aluminum Header Pipe Slitting Machine, As an experienced group we also accept tailored orders. The main aim of our corporation is always to develop a satisfying memory for all shoppers, and set up a long-term win-win business partnership.

The consumer fulfillment is our primary goal. We uphold a consistent level of professionalism, top quality, credibility and service for <u>Condenser Header Pipe Slitting Machine</u>, <u>Header Pipe Slitting Machine</u>, What is good price? We give customers with factory price. In the premise of good quality, efficiency ought to be paid attention to and maintain appropriate low and healthy profits. What is a fast delivery? We make the delivery according to customers' requirements. Although delivery time depends on the order quantity and the complexity of it, we still try to supply products and solutions in time. Sincerely hope we could have long term business relationship. Slitting machine line cuts the metal coil into strips of various widths required, and then collects the strip into small rolls for use in the next process.


		Slitting line machine parameters
Raw Material (if the	1	Material: carbon steel and others
material is stainless	2	The thickness of the material: 0.4mm-6mm.
steel, please tell in	3	Width: 10mm, 12mm, 15mm, 20mm, 25mm, 30mm, 40mm, 50mm, 60mm
advance)	4	Input width: 600-1600mm
Hydraulic decoiler	1	The inner size: 450610mm
with car	2	The Max width: 1250mm
	3	The capacity: 15T 20Ton or more
Flatting and Cutting	1	2 shafts for feeding coil, 9 shafts for flatting
System	2	material of flatting: 42CrMo heat treated 50-52.
	3	hydraulic system.
	4	2 sets cutting blade
	5	width of cutting: 600mm1220mm.
	6	the material of blade mould: Gr12MoV
	7	power: 22KW Motor with ZQ650 Reducer
Slitting system	1	The width range: 2001300mm
	2	The precious of the width: ±1mm
	3	The speed of slitting: 25m/min
	4	The width can be change.
	5	Material of the slitting: Cr12MoV.
	6	Hardness of slitting blade: HRC5860.
	7	Slitting: 2~3mm 6 lines.
	8	Quantity of blades: 10 sets.
	9	Width of side scrap: 3-15mm
	10	The precious of side scrap: ±0.5mm
	11	Quantity of side scrap: 2 strips
	12	Power of the slitting: 37KW, 1000r/min, with ZQ750 Reducer.
Control System	1	Screen: 3.2inch button screen
	2	PLC: Delta
Electrical collecting	1	Material inner: 550-650mm
machine with car	2	Max Coil width: 1500mm

	3	Carrying capacity: 5T
	4	Automatic relax or collect
	5	Power: 22KW

## **Working process**

Decoiler ----flatting and cutting----flatting and collecting

## work process

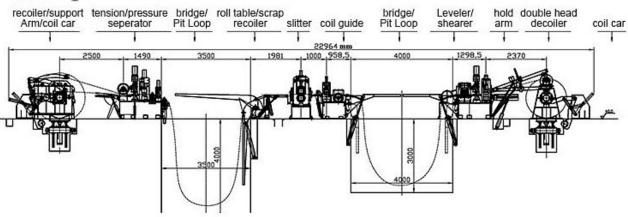

Machine picture display



	_
Packaging Details?	
1. Machine is covered by plastic film.	
2. PLC control box, spare parts and other small parts are packed by wooden carton box.	
Product link: https://www.toprollformingmachine.com/?p=132071	